

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[FCI](#)
[86093487814748ELF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

DIMENSIONS

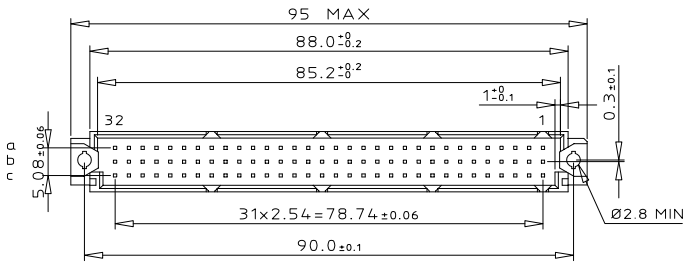


TERMINATION

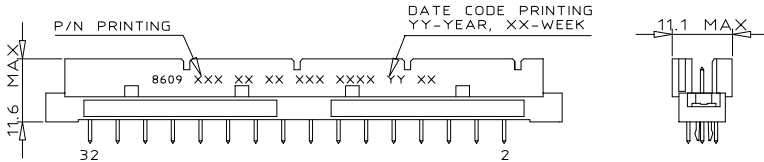

ORDERING INFORMATION

SERIES	8609	3	48	7	8	14	7	4	8	ELF
ROWS FITTED WITH CONTACTS										
ROW a b c			3	48						
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R										
TERMINATION										
STRAIGHT SPILL										
OPTIONS										
NO OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
5.08 mm EVEN LOADING										
LEAD FREE VERSION										

PCB LAYOUT

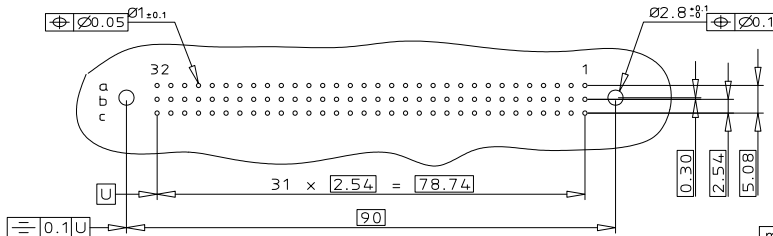

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING 8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family	8609
ltr	ecn	na	dr	date	tolerances unless otherwise specified		mm	title	DIN REVERSE HEADER
A	109-0045	KR	2009-03-19		angles	linear	0.X ±0.1	DIN 41612 STYLE R	
					0.XX ±0.1	0.XXX ±0.1	scale 3:2	dwg no	sheet 1 of 1
					dr	KESAVAN R	2009-03-19	size	A3
					enqr	KESAVAN R	2009-03-19	type	Product Customer Drawing
					chr	KESAVAN R	2009-03-19		
					appd	BIJU K PAUL	2009-03-19		
sheet index	revision sheet	A	1						