

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[85965-102LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NR.	PLATING CONTACT AREA:	
85965-XYZ	DASH NR:	PERFORMANCE LEVEL
85965-XYZLF	-1YY/1YYLF	TELCORDIA CO
	-2YY/2YYLF	CUSTOMER SPECIAL
	-3YY/3YY F	CUSTOMER SPECIAL

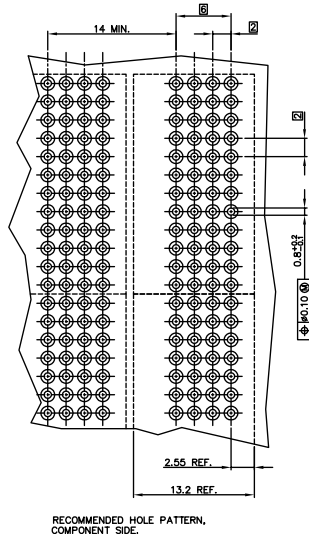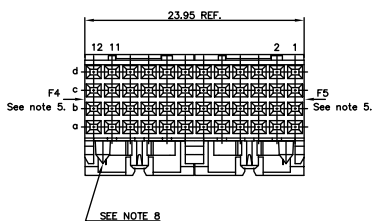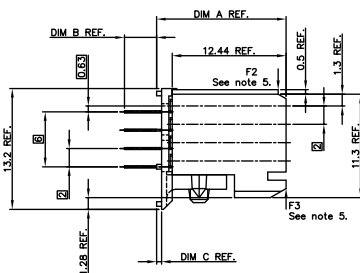

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

DASH NR	CONFIGURATION												PCB THICKN.	DIM A	DIM B	DIM C	DIM D	
	ROW #	COLUMN #																
		12	11	10	9	8	7	6	5	4	3	2						1
-X01	D	+	+	+	+	+	+	+	+	+	+	+	+	2.4	14.14	3.50	0.54	17.64
-X01LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
-X02	D	+	+	+	+	+	+	+	+	+	+	+	+	3.2	13.60	4.04	0.00	17.10
-X02LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
-X03	D	+	+	+	+	+	+	+	+	+	+	+	+	2.4	13.60	3.24	0.00	17.10
-X03LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
-X04	D	+	+	+	+	+	+	+	+	+	+	+	+	1.6	13.60	2.39	0.00	17.10
-X04LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
-X05	D	+	+	+	+	+	+	+	+	+	+	+	+	1.6	14.14	2.70	0.54	17.64
-X05LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
-X06	D	+	+	+	+	+	+	+	+	+	+	+	+	1.6	14.64	3.00	0.54	18.14
-X06LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
-X07	D	+	+	+	+	+	+	+	+	+	+	+	+	1.6	15.14	2.50	0.54	18.64
-X07LF	C	+	+	+	+	+	+	+	+	+	+	+	+					
	B	+	+	+	+	+	+	+	+	+	+	+	+					
	A	+	+	+	+	+	+	+	+	+	+	+	+					
"-" POSITION NOT LOADED																		
"+" POSITION LOADED																		

NOTES:

1. BODY MATL: LIQUID CRYSTALL POLYMER 30% GLASS FIBER REINFORCED
2. FLAME RETARDANT ACC. UL 94-V0
3. TERMINAL MATERIAL: PHOSPHOR BRONZE.
4. PLATING SOLDERTAILS - 2.5 μ m SnPb 90/10 OR - 2.8 μ m PURE Sn FOR LF
5. LOAD IN THIS DIRECTION SHALL BE 100% OF THE TENSILE STRENGTH OF THE
6. 30 NEWTON MAXIMUM PER 12 mm CONNECTOR LENGTH.
7. LOAD IN THIS DIRECTION 25 NEWTON MAXIMUM PER CONNECTOR.
8. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
9. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
10. DRAWING LOCATION PER THE REQUIREMENTS OF BOTH SIDES OF PRODUCT.
11. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER CONSUMER REGULATIONS AS DESCRIBED IN GS-22-008
12. THE HOUSING SHALL BE EXPOSED TO 100% HUMIDITY PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

part no		tolerances unless otherwise specified		CUSTOMER COPY		 ELECTRONICS www.fabbase.com	
litz acc no dr date				projection		title	
H 0000-0078 17/10/2012		Linear				STR SIGN RCP	
J 0000-0000 00/00/00		examples		mm		STB + WAFER 24mm	
D 10000300 PHL 000004 00		AL MELAKH 000010		scale		project FEMTEKAL (mm)	
E 100450 000 000000 00		H. MELER 000010		1:1		size (ug) no 213	
F 000000 000 000000 00		P. SOKALK 000010		A1		85965	
G 000000 000 000000 00		P. SOKALK 000010				sheet 1 of	
sheet revision J							