Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

FCI
D09P23B4PV00LF

For any questions, you can email us directly:
sales@integrated-circuit.com

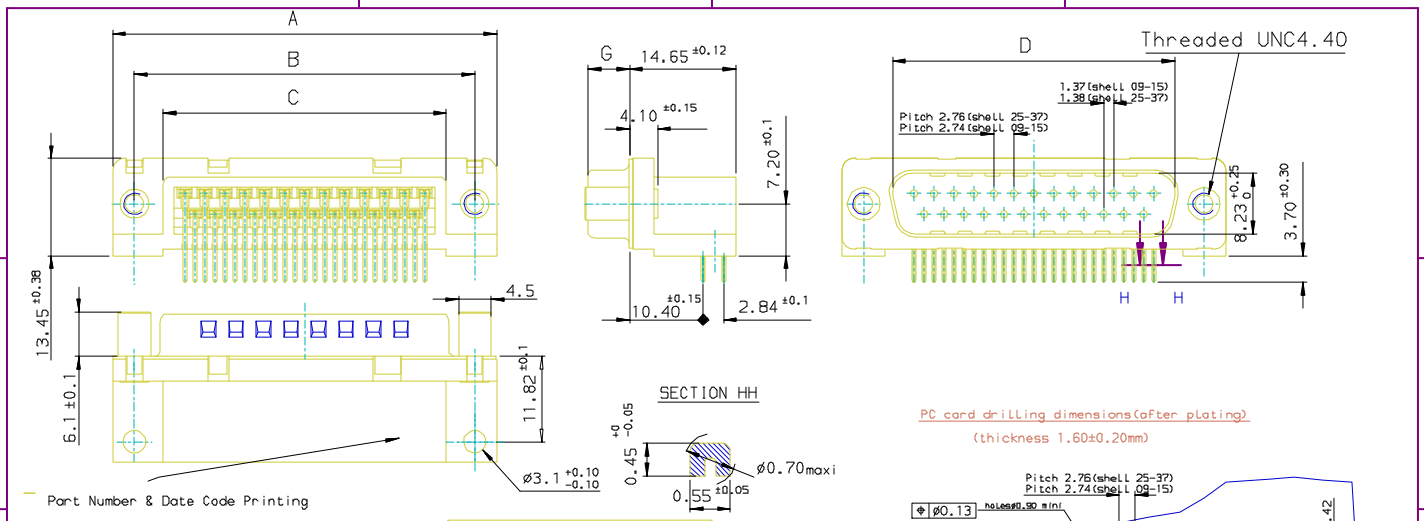

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

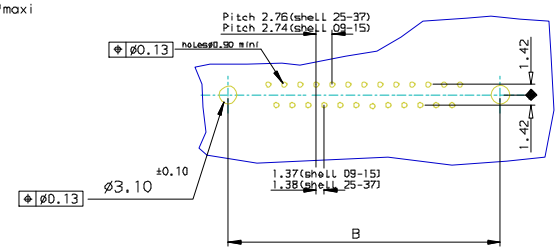

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	G±0.25	PART NUMBER Plating:0.76μ AU	PART NUMBER Plating:Flash AU
09	30.81	24.99	16.96	16.79	5.90	D09P23B6PV00**	D09P23B4PV00**
15	39.14	33.32	25.18	25.12	5.90	D15P23B6PV00**	D15P23B4PV00**
25	53.03	47.04	39.12	38.84	5.70	D25P23B6PV00**	D25P23B4PV00**
37	69.32	63.50	55.68	55.30	5.70	D37P23B6PV00**	D37P23B4PV00**

LF FOR LEAD FREE

Technical characteristics:
Shell:steel tin/Zinc Cr3 plated
Insulators:self-extinguishing black polyster,ULclass94V0
Contacts size 20:brass,gold on mating end,bright tin on termination end over nickel on entire contact
Cycles :500 for protection 6
:200 for protection 4
-
-
Female screwlock:brass,tin plated torque:0.7N/m
Electrical characteristics:
max.current rating:5A
Test voltage:1000V
Rated voltage:300V
Contact resistance:<15mΩ
Shell resistance:<5mΩ
Insulation resistance:>5000MΩ
Climatic characteristics:
Operating temperature range:-55°c +125°c
Dimensions:
in accordance with MIL-C-24308

FOR ROHS DETAILS REFER DWG.NO:C01-8646-0000

European Views

rev	ecn no	dr	date
B	105-0124	JS	2005/07/27
C	106-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm		
	TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr JOHN SLEEBA 1999/05/17	ANGULAR	LINEAR	0.X ±0.1	size A3	Scale 1:1	
Eng GEORGE VJ 1999/05/17			0.XX ±0.1			
Chr GEORGE VJ 2005/07/27	0.11° ±1°		0.XXX ±0.1	ECN -		
Appr KVSD 2005/07/27	Product family D-SUB			Spec ref -		
title MALE CONNECT.DELTA D RIGHT ANGLE WITH FEMALE SCREWLOCK.				dwg no C01-8646-0673	Rev. B	
catalog no DELTA-D				CUSTOMER	sheet 1 of 1	

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:C STATUS:Released Printed: Jan 18, 2011