

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[73324-303LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


PRODUCT NUMBER
73324-YXXLF

PLATING, SEE TABLE

LEAD FREE OPTION
SEE NOTE 6

TOTAL NB OF POS



TOP VIEW



NOTES:



- 1 - MATERIAL HOUSING: THERMOPLASTIC POLYESTER 30% GLASS FILLED COLOUR BLUE, FLAME RETARDANT PER UL-94 CATEGORY V0.
- 2 - MATERIAL PIN: COPPER ALLOY.
- 3 - MIN PUSH OUT FORCE TERMINAL : 15N
- 4 - MAX PROTUSION 0.3 MAX IN 4 PLACES. IN BOTH DIRECTIONS.
- 5 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS PER ROW, N x 2.54 = 20.32mm
- 6 - "LF" MEANS THAT THE PRODUCT IS RoHS COMPLIANT THEN MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-47-0004

(N x 2.54) - 0.18 ± 0.15

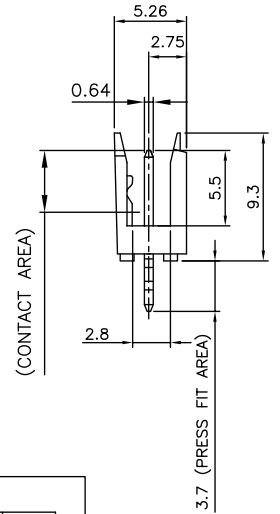

THERE IS NO NECESSARY A GROOVE IN EVERY POSITION ON THIS SIDE.

DRILLED HOLE $\phi 1.15 \pm 0.025$ DIA.
COPPER PLATING 0.025 MIN. 0.075 MAX.
TIN/LEAD PLATING 0.005 MIN. 0.015 MAX.
FINISHED HOLE $\phi 0.94$ MIN. $\phi 1.09$ MAX.

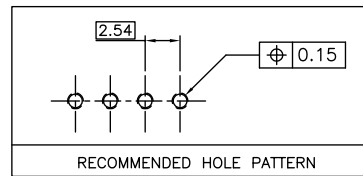

RECOMMENDED HOLE PATTERN

73324-3XXLF	0.76µm Au/GXT	1.0µm MATTE TIN
PLATING CODE	CONTACT AREA	PRESSFIT TAIL AREA
	PLATING THICKNESS OVER 1.27µm Ni MIN	

mat'l. code	SEE NOTES	surface	tolerance	projection	product family
lfr	ecn no	dr	date	ISO 1302	DUBOX HDR
H	B-19286	AMA	14.11.03	ISO 446	title PRESS FIT SINGLE ROW
J	F-21810	AMA	15.06.19	ISO 1101	
D	F20102	DLE	02.01.09	dr	mm
E	F08-0228	LMU	06.07.11	engr	scale 1/3
F	F08-0298	LMU	06.10.18	chr	sheet 1 of 1
G	F08-0147	YOV	08.04.14	app	size A3
sheet index	revision sheet				dwg no 73324
					type CUSTOMER Drawing