

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)
[HM2R03PA5108L9LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

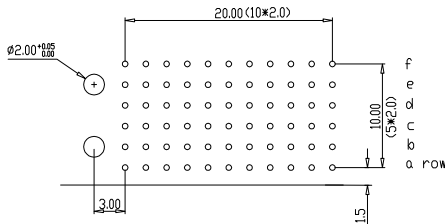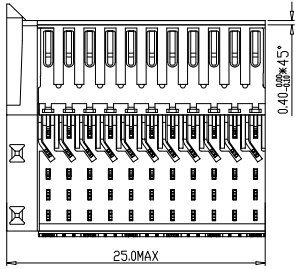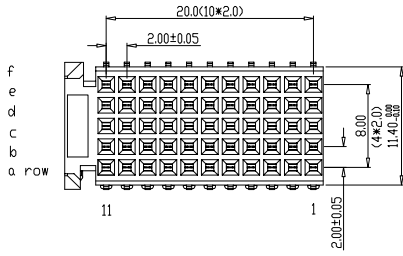

PERFORMANCE CHARACTERISTICS

1.5A AT 20°C (FULLY LOADED)
CURRENT RATING 1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁸ MΩ MIN

- NOTES 1' LEAD FREE INDICATOR *LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 - FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA-201572.001
 - THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref	
Mat code		tolerance	
Heatreat		100C ± 0.2 INEC	
Plating/Finish		200C ± 0.2 INEC	
Dr		projection	
W/Paris		MM	
07-04-92		size A4	
Product family		Scale	
MILLIPACS		2.000	
Model Name		ECN	
Model Revision		REL Level	
FCI		title	
MPACS 5+2R RA RCP		dwg no	
CONN TYPE C		BSC201444048	
Rev.		E	
Pro/E file		catalog no	
HM2R03PA5108----		CUSTOMER DRAWING	
sheet 1 of 1			