

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[FCI](#)
[HM2R82PA8104N9LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du Propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

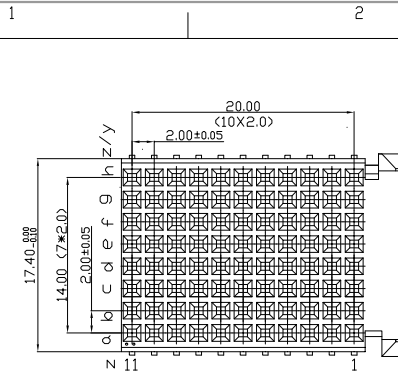

LAY-OUT
P.C.B.- HOLE

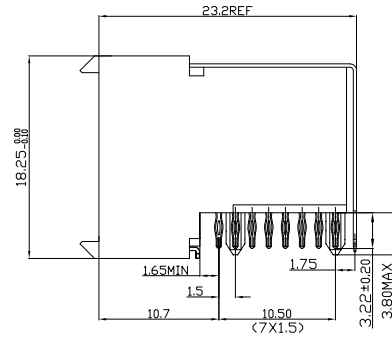

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (C/INT /C/INT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/C/INT
- EXTRACTION FORCE : 0.15N MIN/C/INT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES 1' LEAD FREE INDICATOR LF-LEAD FREE
 PERFORMANCE LEVEL INDICATOR (REF DWG NO:ISS 23844-003)

2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

| | | | | | |
|------|-------|--------------------|---|------------------|------------------|
| | | www.fciconnect.com | tolerance 1DEC +0.2 1DEC 2DEC +0.1 2DEC ANGLES ±1° HEXEN | projection | MM |
| Dr | Mfret | 08-04-99 | Product family | MILLIPICS | size A4 |
| Eng | Chr | | Spec ref | | Scale 3/1 |
| Appr | | | Material | | ECN |
| Dr | 010 | | MPACS 8+2R RA RCP CONN TYPE FR/WITH SHIELDED | ding C | BS,C ,202260,013 |
| Appr | | | catalog no | HM2R82PA8104---- | Rev. D |
| | | | | CUSTOMER | sheet 1 of 1 |

eDOC - PDM: Rev:D

STATUS: Released

Printed: Jun 16, 2011