

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[HM2R88PAEA20N9LF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com




Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

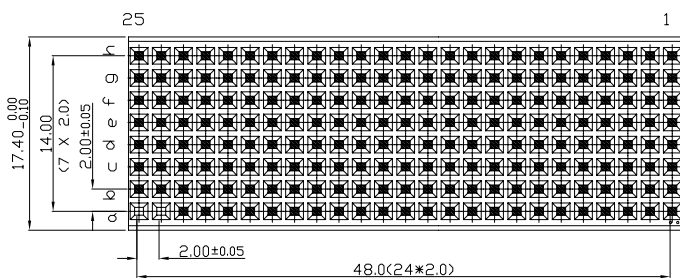

☒ CAVITY LOAD WITH CONTACT

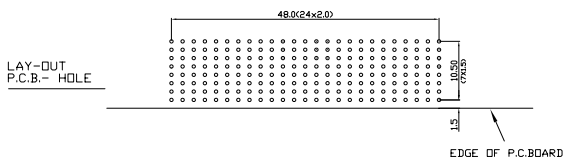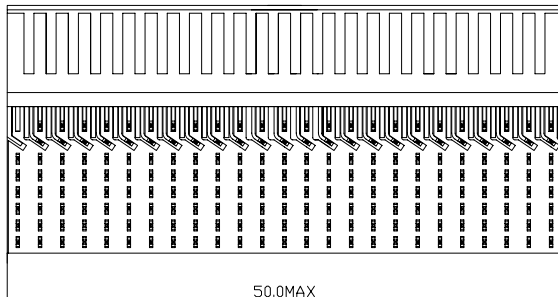

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
CURRENT RATING 1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

- NOTES 1' LEAD FREE INDICATOR LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR
REF: Dwg NO:BS-20844-003
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BSA201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION	KN	14-09-01
B	D085-0381	Kason	10-10-05
C	D087-0362	Kason	05-09-07

www.fciconnect.com		tolerance 1DEC #0.2 1DEC 2DEC #0.1 2DEC ANGLES #1° HOEKEN	projection MM	size A4	Scale 3/1
Dr	M.Fret	19-10-01	Product family	MILLIPICS	
Eng			Spec ref		
Chr			Material		
Appr			ECN		
MPACS 8+2R RA RCP CONN TYPE E/ UPPER SHIELDED			chg no	BS,C ,202747,003	Rev. C
catalog no			HM2R88PAEA20-----		
			CUMSTOMER		
			sheet 1 of 1		