

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[FCI](#)
[HM2R05PA5108N9LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

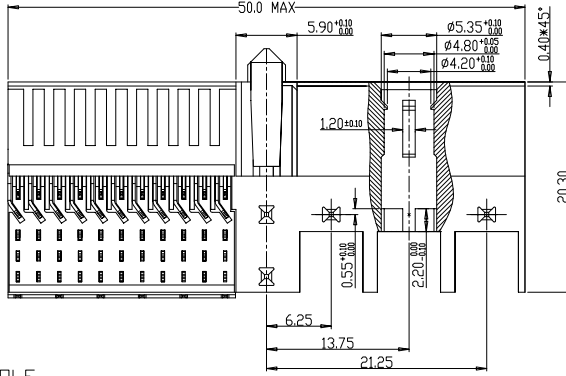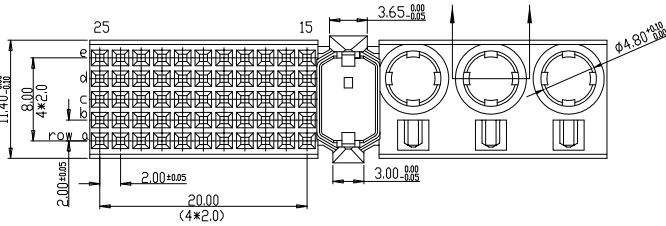

LAY-OUT
P.C.B.- HOLE

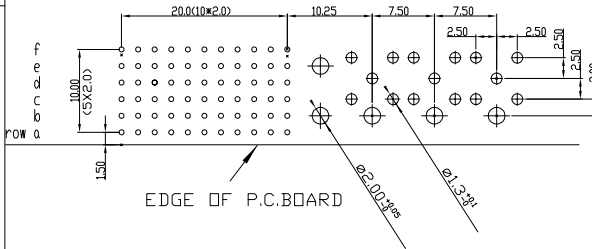

PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE: -55°C TO 125°C
- CONTACT RESISTANCE: 20 mΩ MAX
- INSERTION FORCE: 0.75N MAX /CONT
- EXTRACTION FORCE: 0.15N MIN /CONT
- INSULATION RESISTANCE: 10¹⁰ MΩ MIN

NOTES

- LEAD FREE INDICATOR -LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BS.C.201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING BSA.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref	
Mat code		tolerance	projection
Heatreat		138C±0.2 138C SPEC ± 0.10 200C MILLI-PACS-RECEPTACLE	MM
Plating/Finish		size	Scale
Dr M.Fret	010601	A4	1.500
Eng		Model Name	ECN
Chr		Model Revision	REL Level
Appr			
FCI		title	Rev.
Pro/E file	catalog no	HM2R05PA5108----	D
	customer	BS,C ,201444,051	
	sheet	1 of 1	

rev	ecn no	dr	date
A	CONVERSION	KN	14-09-01
B	105-0081	ALEX	31-05-05
C	DG07-0362	keson	05-09-07
D	DG10-0110	NZ	05-30-10
-	-	-	-
-	-	-	-