

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[FCI](#)
[10105229-0001LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

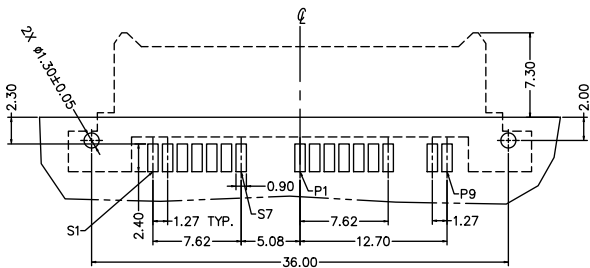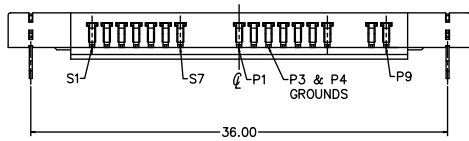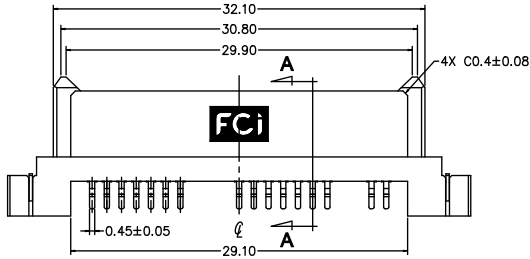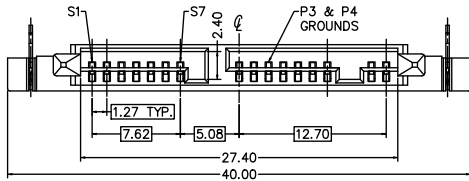

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm

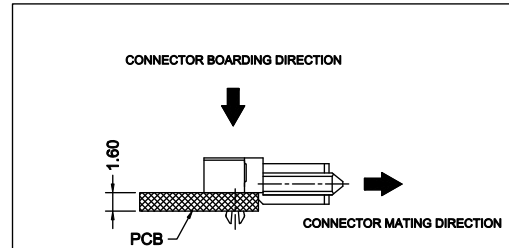

NOTES:

- MATERIAL**
 - HOUSING : HIGH TEMP THERMOPLASTIC UL94V-0(COLOR: BLACK)
 - TERMINAL : COPPER ALLOY
 - HOLD DOWN : COPPER ALLOY
- FINISH**
 - TERMINAL : Au PLATING (CONTACT POINT) OVER 50u" NICKEL
 - SOLDER TAIL : 50u" min MATT TIN OVER 50u" NICKEL
 - HOLD DOWN : 50u" min MATT TIN OVER 50u" NICKEL
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260° FOR 10 SEC. IN REFLOW SOLDER APPLICATION WITH 1.6MM MINIMUM CIRCUIT BOARD.
- PRODUCT SPEC: GS-12-494
PACKING SPEC: GS-14-1283
- PRODUCT NUMBERING:
10105229 - X 0 0 X LF

1: TRAY PACKING
0: 50" GOLD PLATING

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI		
ltr	ecn no	dr	date	linear	.X ± 0.38	projection		www.fciconnect.com		
A	T09-1141	S.LIN	11/02/09		.XX ± 0.25			title MICRO S-ATA RECP R/A, SMT TYPE		
					.XXX ± 0.15					
				angles	0° ± 2°					
				dr	STERLING LIN 11/02/09			MM	product family SATA	code TWN
				engr	STERLING LIN 11/02/09					
				chr	GARY HSIEH 11/02/09	A4	10105229			
				appd	JOSEPH HSIA 11/02/09			sheet 1 of 1		
sheet index		revision sheet		A	1					

ACAD

PDM: Rev:A

STATUS Released

Printed: Jul 21, 2010