

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)

[10106262-B006001LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PART NUMBER 10106262-B006001LF

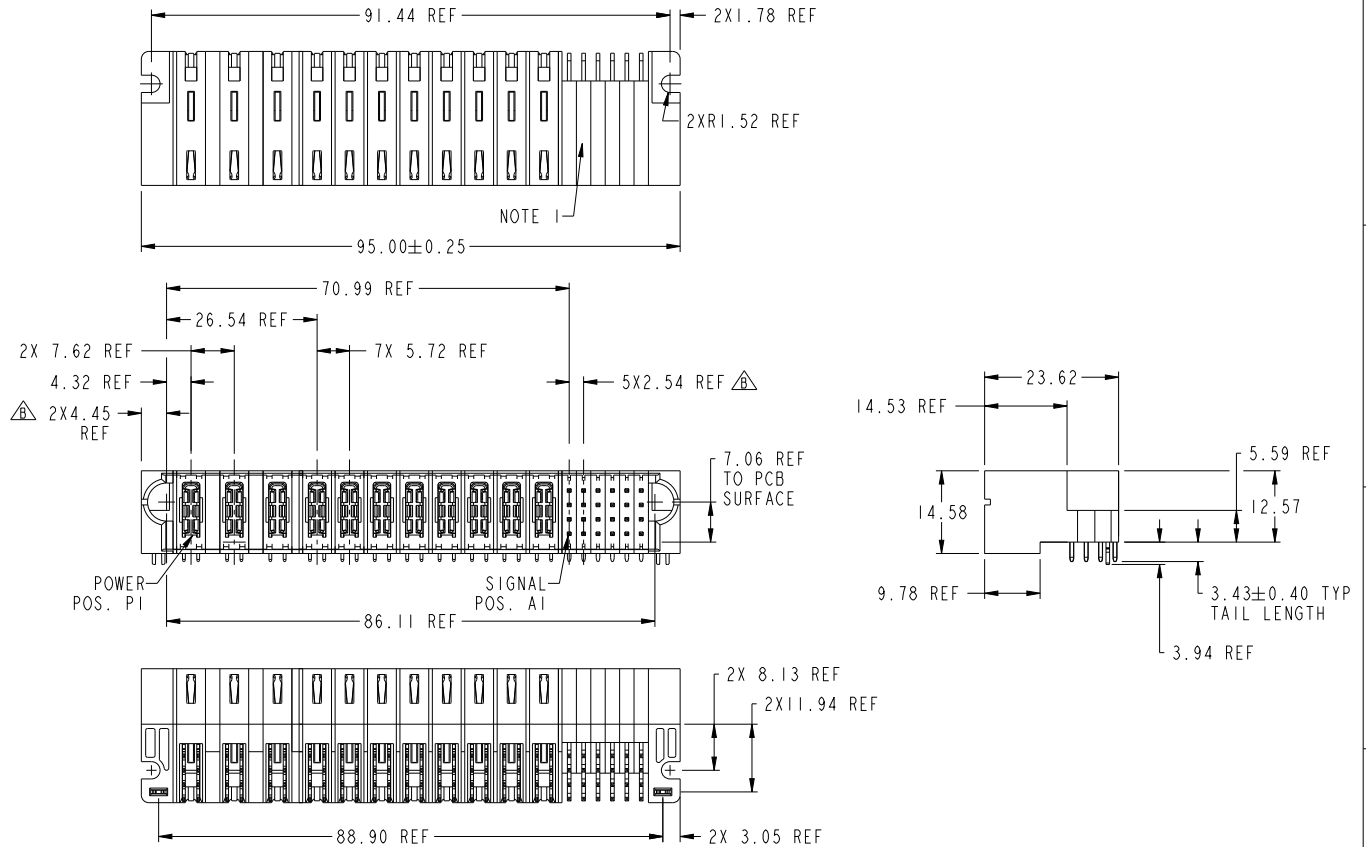

Copyright FCI

spec ref	-	dr	Peng-Bing Fu	20120208	projection	MM	size	A3	scale	3:2		
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	20121014			ecn no	ELX-00-01843-1	rel level	Released		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	20121115							product family	PwrBlade+
surface	linear	appr	Pai-Ming Zhang	20121115							cat. no.	10106262-B006001
	angular	www.fci.com			Product - Customer Drw		sheet 1 of 3					

Print Date - REV C - 2009-04-09

1



2

3

PDS: Rev B

STATUS: Released

Printed: Nov 16, 2012

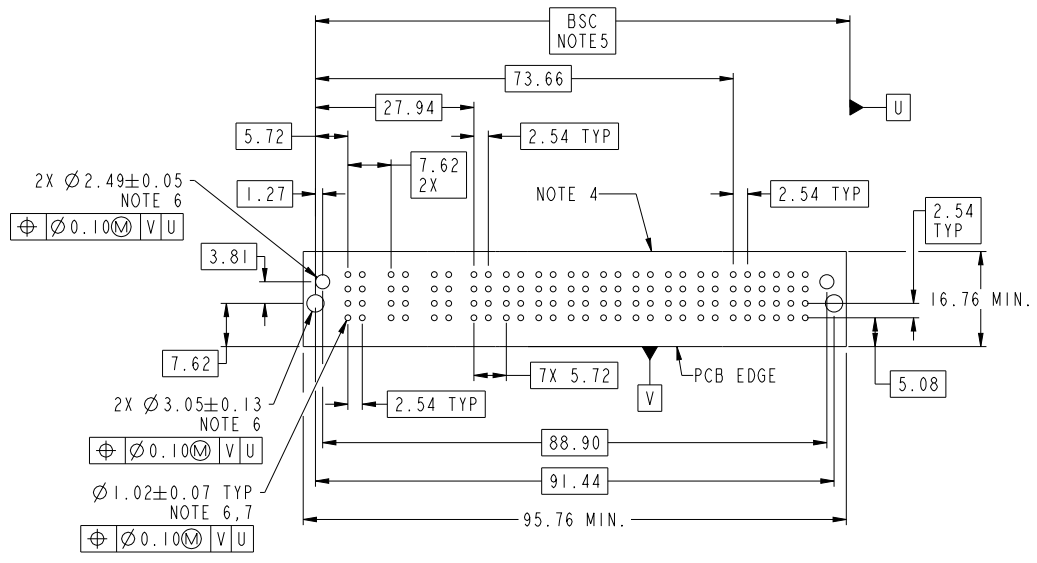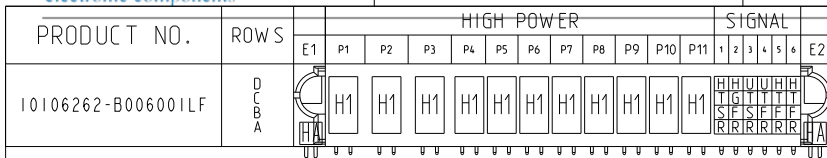

CODE	DESCRIPTION
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H	MLBF SIGNAL CONTACT, ROW D (3.43)
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)


spec ref	-	dr	Peng-Bing Fu	20120208	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	20121014	chr	Shao-Qi Kuang	ecr no	ELX-00-01843-1	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	20121115	appr	Pai-Ming Zhang	product family	PwrBlade+	cat. no.	10106262-B006001
surface	linear	0.X	±0.5	www.fci.com		title	3ACP + 8HP + 24S	rev	B	
		0.XX	±0.25				RA STB HEADER			
		0.XXX	±0.10							
	angular	0°	±2°							

Copyright FCI.





D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) A  B SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION



Copyright FCI.

spec ref	-		dr	Peng-Bing Fu	20120208	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5		eng	Peng-Bing Fu	20121014		← PwrBlade+ →	ecn no	ELX-00-018143-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	20121115	product family			PwrBlade+	rel level	Released	
surface	linear	0.X	±0.5		title	3ACP + 8HP + 24S	eng no	10106262-B006001	rev	Product - Customer Drw	
		0.XX	±0.25								
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		sheet 3 of 3			