

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[10106263-D006002LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER SEE SHEET 2

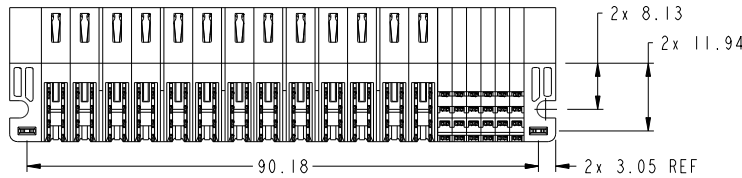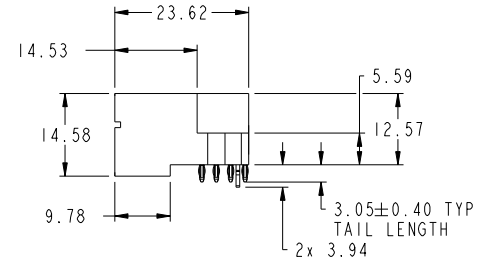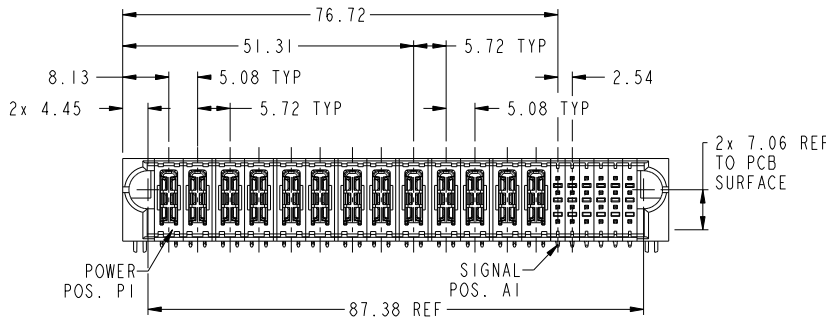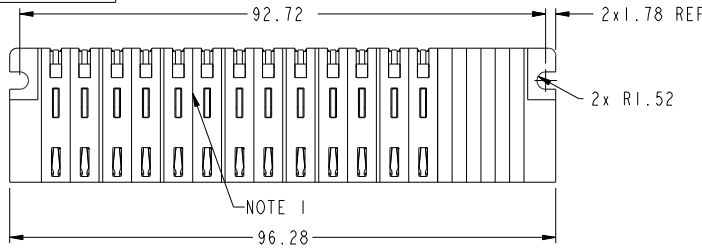

Copyright FCI

spec ref	dr	20140901	projection	MM	size	A3	scale	3:2
tolerance std	eng	20151029			ecn no	ELK-00-2226-1	rel level	Released
ASME Y14.5	chr	20151102						
TOLERANCES UNLESS OTHERWISE SPECIFIED			www.fci.com		cat. no.	13HP + 24S	eng no	10106263-D006002
surface	linear	0.X ±0.50	RA PF HEADER		rev	C	Product - Customer Drw sheet 1 of 3	
		0.XX ±0.25						
		0.XXX ±0.10						
ASME Y14.5	angular	0° ±2°						

Prod File - REV C - 2010-04-09

1

2


3

PDS: Rev :C

STATUS:Released

Printed: Nov 05, 2015

PRODUCT NO.	ROWS	HIGH POWER													SIGNAL							
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	1	2	3	4	5	6	E2
10106263-D006002LF	D C B A	HE	HE	HE	HE	HE	HE	HE	HE	HE	HE	HE	HE	HE	SD	SD	SD	SD	SD	SD	SD	SD

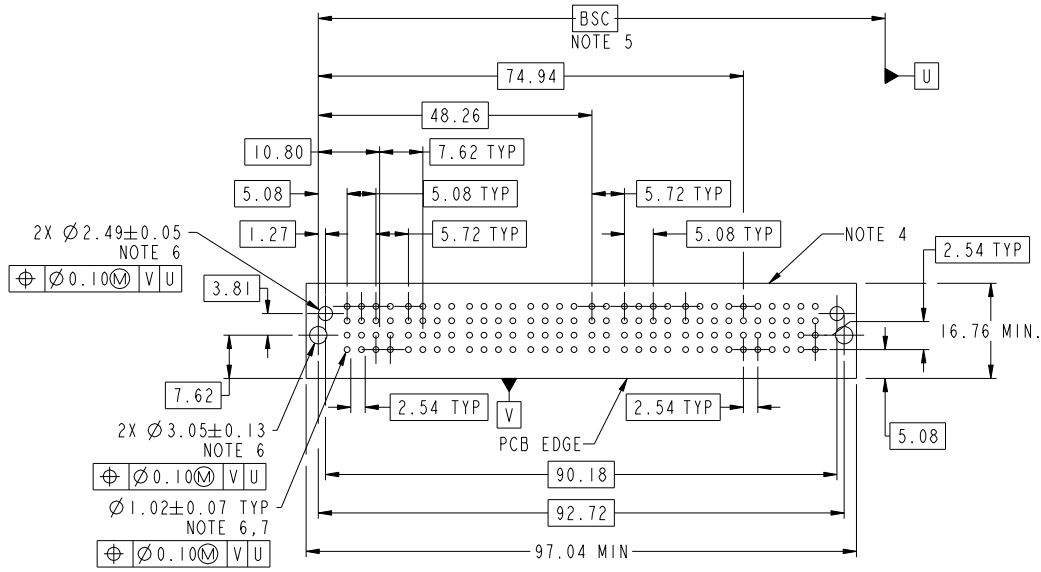

CODE	DESCRIPTION
FD	FMLB SIGNAL CONTACT, ROW D (3.05)
HA	METAL HOLD DOWN
HE	STD HIGH POWER CONTACT (3.05)
LA	LMFB SIGNAL CONTACT, ROW A (3.05)
LC	LMFB SIGNAL CONTACT, ROW C (3.05)
SA	STD SIGNAL CONTACT, ROW A (3.05)
SB	STD SIGNAL CONTACT, ROW B (3.05)
SC	STD SIGNAL CONTACT, ROW C (3.05)
SD	STD SIGNAL CONTACT, ROW D (3.05)

dr	Rainbow Zhou	20140901	projection	MM	size	A3	scale	3:2
eng	Vickiing Liu	20151029			ecn no	ELK-00-2228-1		
chr	Fancy Zhang	20151102			rel level	Released		
appr	Pai-Ming Zheng	20151102	product family	PwrBlade+				
			13HP + 24S RA PF HEADER		dwg no 10106263-D006002	rev C		cat. no. Product - Customer Drw sheet 2 of 3

Part File - REV C - 2015-04-29

1

2

3

PDS: Rev -C

STATUS:Released

Printed: Nov 05, 2015



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 1011635I
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.

dr	Rainbow Zhou	201409021	projection	MM	size	A3	scale	3:2
eng	Vickiing Liu	20151029			ecn no	ELK-00-22236-1		
chr	Fancy Zhang	20151102			rel level	Released		
appr	Pai-Ming Zheng	20151102	product family	PwrBlade+				
		13HP + 24S RA PF HEADER		www.fci.com	cat. no.	10106263-D006002	Product - Customer Draw	sheet 3 of 3



Copyright FCI.