

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[10106268-0013101LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER SEE SHEET 2

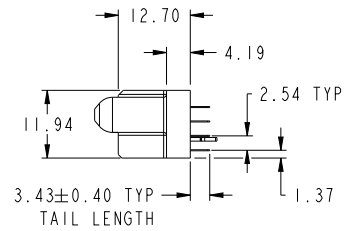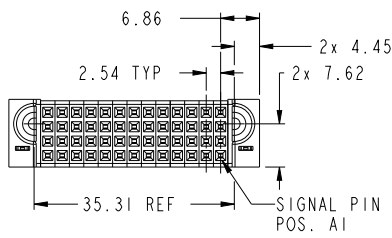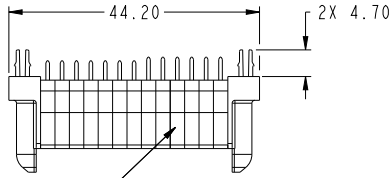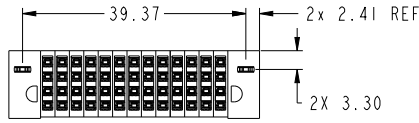

spec ref	dr	Rainbow Zhan	20140904	projection	MM	size	A3	scale	3:2
tolerance std	eng	Rainbow Zhan	20140915			ecn no	-	rel level	Released
ASME Y14.5	chr	Li-Ho	20140914						
	appr	Pai-Ming Zhang	20140915						
TOLERANCES UNLESS OTHERWISE SPECIFIED				product family	PowerBlade+				
surface	linear	0.X	±0.50		52S VT STB RECEPTACLE	eng no	10106268-0013101	rev	A
		0.XX	±0.25						
		0.XXX	±0.10						
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		sheet 1 of 3	

Prod File - REC C - 2009-04-09

1

2

3


PDS: Rev :A

STATUS:Released

Printed: Jul 15, 2014

Copyright FCI.

PRODUCT NO.	ROWS	SIGNAL	CODE	DESCRIPTION
10106268-0013101LF	D C B A	E1	E	STD SIGNAL CONTACT
		13	HA	METAL HOLD DOWN
		12		
		11		
		10		
		9		
		8		
		7		
		6		
		5		
		4		
		3		
		2		
		1		
		E2		

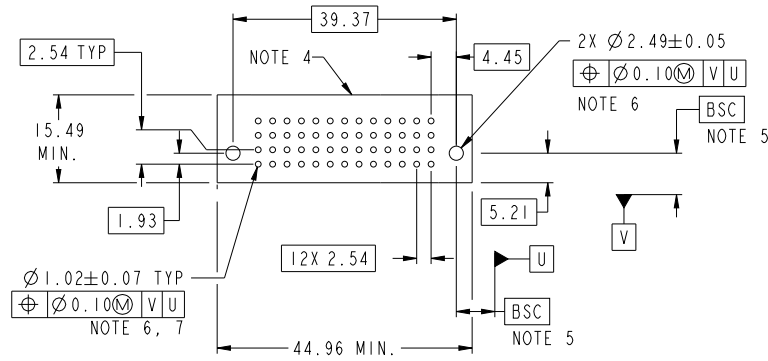




dr	Rainbow Zhan	201409294	projection	MM	size	A3	scale	3:2
eng	Rainbow Zhan	201409215			ecn no	-	rel level	Released
chr	Li-Hu	201409214						
appr	Pai-Ming Zhang	201409215	product family	PowerBlade+				
			title	52S	eng no	10106268-0013101	rev	A
www.fci.com			cat. no.	Product - Customer Drw		sheet 2 of 3		



Copyright © FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10124315.
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Rainbow Zhan	201409294	projection	MM	size	A3	scale	1:1
eng	Rainbow Zhan	201409215			ecn no	rel level	Released	rev
chr	Li-Hu	201409214						
appr	Pai-Ming Zhang	201409215	product family	PowerBlade+				
		title	52S VT STB RECEPTACLE		eng no	10106268-0013101		A
www.fci.com		cat. no.	3		Product - Customer Drw		sheet 3 of 3	



Copyright FCI.