

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[10106269-0004001LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER SEE SHEET 2



spec ref	dr	Peng-Bing Fu	20130522	projection	MM	size	A3	scale	3:2
tolerance std	eng	Peng-Bing Fu	20130508			ecn no	-	rel level	Released
ASME Y14.5	chr	-	20130508						
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pai-Ming Zhang	www.fci.com		cat. no.	10106269-0004001	rev	A
surface	linear	0.X	±0.50	FCI		Product - Customer Drw		sheet 1 of 3	
		0.XX	±0.25	VT PF RECEPTACLE					
		0.XXX	±0.10						
ASME Y14.5	angular	0°	±2°						

Prod File - REC C - 2009-04-20

1

2

3

PDS: Rev :A


STATUS:Released

Printed: May 08, 2013

Copyright FCI

PRODUCT NO.	ROWS	SIGNAL			
		E1	4	3	2
10106269-0004001LF	D	FF	FF	FF	FF
	C	FF	FF	FF	FF
	B	FF	FF	FF	FF
	A	FF	FF	FF	FF

CODE	DESCRIPTION
F	STD SIGNAL CONTACT
HA	METAL HOLD DOWN

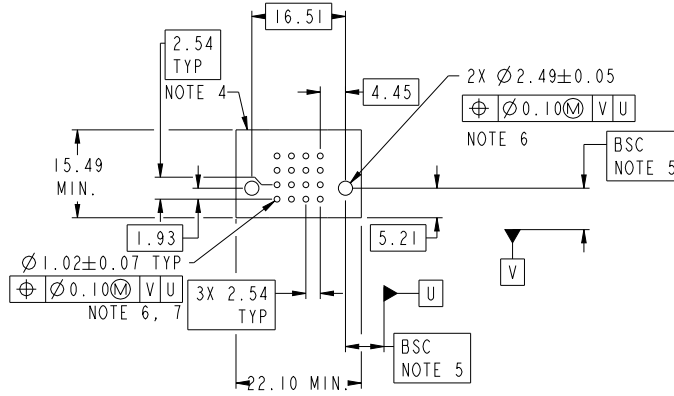




dr	Peng-Bing Fu	2013/02/22	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	2013/02/08			ecn no	-	rel level	Released
chr	-	-						
appr	Pai-Ming Zhang	2013/02/08	product family	PowerBlade+				
			title	16S	eng no	10106269-0004001	rev	A
www.fci.com			cat. no.	Product - Customer Drw		sheet 2 of 3		



NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Peng-Bing Fu	2013/05/22	projection	MM	size	A3	scale	1:1	
eng	Peng-Bing Fu	2013/05/08			ecn no				
chr	-	-			rel level	Released			
appr	Pai-Ming Zhang	2013/05/08	product family	PowerBlade+					
		title	16S VT PF RECEPTACLE		eng no	10106269-0004001		rev	A
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3				



Copyright | FCI.