



# FPF2487

## Dual Channel Over-Voltage Protection Load Switch

### Features

- Dual Channel Power Switch ( $V_{BUS}$  and  $V_{IF}$ )
- Surge Protection under IEC 61000-4-5
  - $V_{BUS}$ :  $\pm 100$  V
  - $V_{IF}$ :  $\pm 40$  V
- Input Voltage Range
  - $V_{BUS}$ : 2.5 V ~ 23 V
  - $V_{IF}$ : 3.1 V ~ 5.5 V
- Max. Continuous Current Capability
  - $V_{BUS}$ : 2.5 A
  - $V_{IF}$ : 6 A
- Ultra Low On-Resistance
  - $V_{BUS}$ : Typ. 33 m $\Omega$
  - $V_{IF}$ : Typ. 11 m $\Omega$
- Over-Voltage Protection
  - $V_{BUS}$ : 5.95 V  $\pm$  50 mV
  - $V_{IF}$ : 5.25 V  $\pm$  250 mV
- LDO Output based  $V_{BUS\_DET}$  for  $V_{BUS}$  Detection
- Active Low Control for  $V_{BUS}$  Path
- OTG Functionality on  $V_{BUS}$  Path
- Conditional Active High Control for  $V_{IF}$  Path
- Reverse-Current Blocking for  $V_{IF}$  Path

### Applications

- Mobile Handsets and Tablets
- Wearable Devices

### Description

The FPF2487 features a 2-channel power switch, which offers surge protection and Over-Voltage Protection (OVP), to protect downstream components and enhancing overall system robustness.

Channel one ( $V_{BUS}$ ) is an active-low, 28 V/2.5 A rated, power MOSFET switch with an internal clamp supporting  $\pm 100$  V surge protection, highly accurate fixed OVP at 5.95 V ( $\pm 50$  mV), and OTG functionality. Channel two ( $V_{IF}$ ) is a conditional active-high, 6 V/6 A rated, power MOSFET switch with an integrated TVS supporting  $\pm 40$  V surge protection and fixed OVP at 5.25 V ( $\pm 250$  mV).  $V_{IF}$  also provides Reverse Current Blocking (RCB) during its OFF state to minimize leakage current.

$V_{BUS\_DET}$  is paired with always ON LDO to power downstream devices even with  $V_{BUS}$  is greater than 2.5 V, even when disabled through the ONB pin. This provides power sequence control or a host controlled configuration in system.

The FPF2487 is available in a 15-bump, 1.6 mm x 2.2 mm Wafer-Level Chip-Scale Package (WLCSPP) with 0.4 mm pitch.

### Related Resources

- <http://www.fairchildsemi.com/>

### Ordering Information

| Part Number | Operating Temperature Range | Top Mark | Package                      | Packing Method |
|-------------|-----------------------------|----------|------------------------------|----------------|
| FPF2487UCX  | -40°C – +85°C               | GX       | 15-Ball, 0.4 mm Pitch WLCSPP | Tape & Reel    |

## Application Diagram

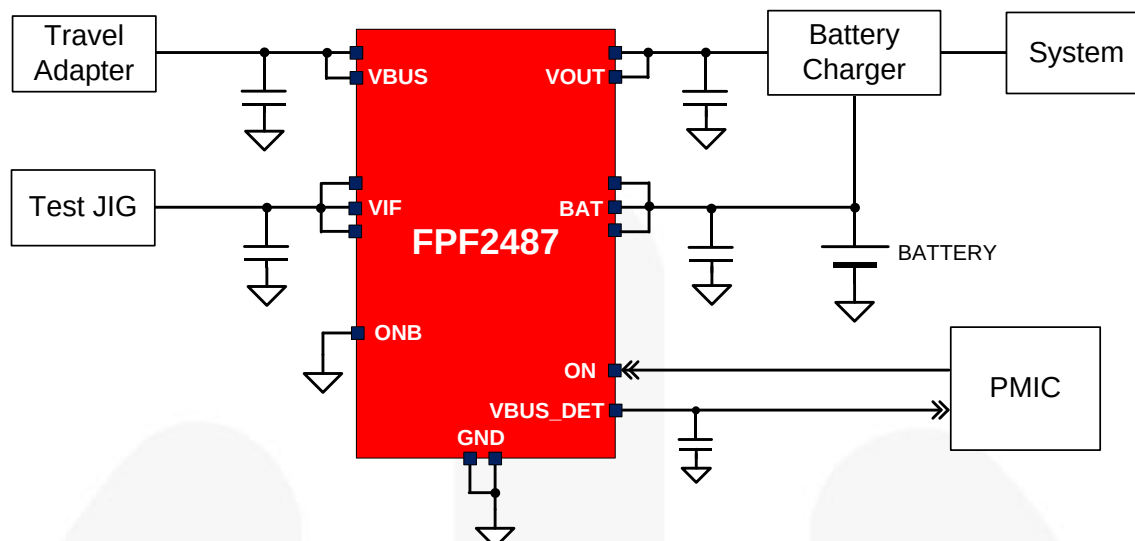


Figure 1. Typical Application

## Block Diagram

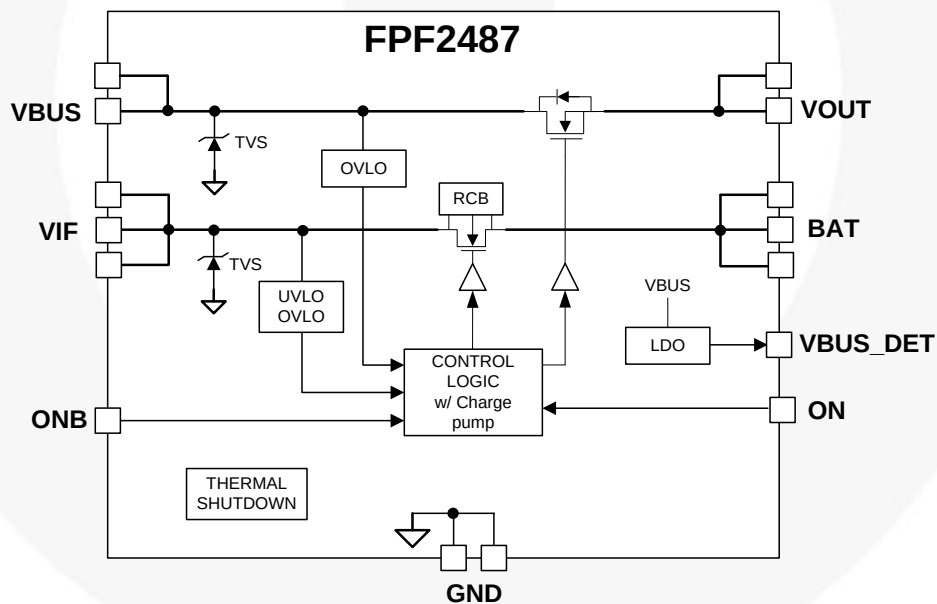


Figure 2. Functional Block Diagram

## Pin Configuration

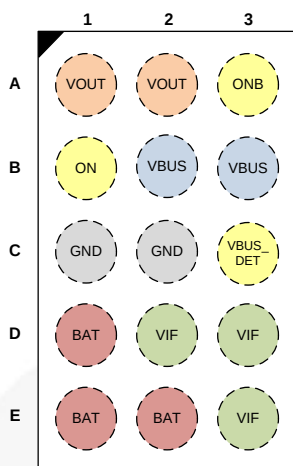


Figure 3. Pin Configuration (Top View)

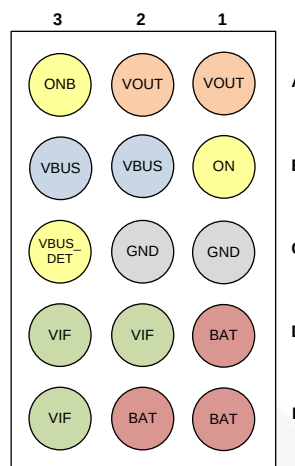


Figure 4. Pin Configuration (Bottom View)

## Pin Definitions

| Name           | Bump       | Type         | Description                                                             |
|----------------|------------|--------------|-------------------------------------------------------------------------|
| $V_{BUS}$      | B2, B3     | Input/Supply | Switch Input and Device Supply                                          |
| $V_{OUT}$      | A1, A2     | Output       | Switch Output to Load                                                   |
| $V_{IF}$       | D2, D3, E3 | Input/Supply | Switch Input and Device Supply                                          |
| BAT            | D1, E1, E2 | Output       | Switch Output to Battery                                                |
| $V_{BUS\_DET}$ | C3         | Output       | Regulated Output according to $V_{BUS}$                                 |
| ON             | B1         | Input        | Active HIGH: $V_{IF}$ path only and when BAT is valid prior to $V_{IF}$ |
| ONB            | A3         | Input        | Active LOW: $V_{BUS}$ path only                                         |
| GND            | C1, C2     | GND          | Ground                                                                  |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol              | Parameter                                                                                       |                                               |                   | Min.              | Max.              | Unit               |
|---------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------|-------------------|-------------------|-------------------|--------------------|
| $V_{BUS}$           | $V_{BUS}$ to GND & $V_{BUS}$ to $V_{OUT}$ =GND or Float                                         |                                               |                   | -0.3              | 29.0              | V                  |
| $V_{IF}$            | $V_{IF}$ to GND                                                                                 |                                               |                   | -2 <sup>(1)</sup> | 6                 | V                  |
| $V_{OUT}$           | $V_{OUT}$ to GND                                                                                |                                               |                   | -0.3              | $V_{IN} + 0.3$    | V                  |
| BAT                 | BAT to GND                                                                                      |                                               |                   | -0.3              | $V_{IF} + 0.3$    | V                  |
| $V_{BUS\_DET}$      | $V_{BUS\_DET}$ to GND                                                                           |                                               |                   |                   | 8                 | V                  |
| $V_{ON(B)}$         | ONB or ON to GND                                                                                |                                               |                   |                   | 6                 | V                  |
| $I_{IN\_VBUS}$      | Continuous $V_{BUS}$ Current                                                                    |                                               |                   |                   | 2.5               | A                  |
|                     | Peak $V_{BUS}$ Current (5 ms)                                                                   |                                               |                   |                   | 5                 | A                  |
| $I_{IN\_VIF}$       | Continuous $V_{IF}$ Current                                                                     |                                               |                   |                   | 6                 | A                  |
|                     | Peak $V_{IF}$ Current (5 ms)                                                                    |                                               |                   |                   | 12                | A                  |
| $I_{IN\_VBUS\_DET}$ | Continuous $V_{BUS\_DET}$ Current                                                               |                                               |                   |                   | 1                 | mA                 |
| $t_{PD}$            | Total Power Dissipation at $T_A=25^\circ\text{C}$                                               |                                               |                   |                   | 1.54              | W                  |
| $T_{STG}$           | Storage Temperature Range                                                                       |                                               |                   | -65               | +150              | $^\circ\text{C}$   |
| $T_J$               | Maximum Junction Temperature                                                                    |                                               |                   |                   | +150              | $^\circ\text{C}$   |
| $T_L$               | Lead Temperature (Soldering, 10 Seconds)                                                        |                                               |                   |                   | +260              | $^\circ\text{C}$   |
| $\Theta_{JA}$       | Thermal Resistance, Junction-to-Ambient <sup>(2)</sup> (1-in. <sup>2</sup> Pad of 2-oz. Copper) |                                               |                   |                   | 81 <sup>(2)</sup> | $^\circ\text{C/W}$ |
| ESD                 | Electrostatic Discharge Capability                                                              | IEC 61000-4-2 System Level ESD                | Air Discharge     | 15                |                   | kV                 |
|                     |                                                                                                 |                                               | Contact Discharge | 8                 |                   |                    |
|                     |                                                                                                 | Human Body Model, ANSI/ESDA/JEDEC JS-001-2012 | All Pins          | 2                 |                   |                    |
|                     |                                                                                                 | Charged Device Model, JESD22-C101             | All Pins          | 1                 |                   |                    |
| Surge               |                                                                                                 | IEC 61000-4-5, Surge Protection               | $V_{BUS}$         | $\pm 100$         |                   | V                  |
|                     |                                                                                                 |                                               | $V_{IF}$          | $\pm 40$          |                   |                    |

### Notes:

1. Pulsed, 50 ms maximum non-repetitive.
2. Measured using 2S2P JEDEC std. PCB.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol             | Parameter                    | Min. | Max. | Unit             |
|--------------------|------------------------------|------|------|------------------|
| $V_{BUS}$          | Supply Voltage, $V_{BUS}$    | 2.5  | 23.0 | V                |
| $V_{IF}$           | Supply Voltage, $V_{IF}$     | 3.1  | 5.5  | V                |
| $C_{IN} / C_{OUT}$ | Input and Output Capacitance | 0.1  |      | $\mu\text{F}$    |
| $C_{VBUS\_DET}$    | Output Capacitance           | 0.47 |      | $\mu\text{F}$    |
| $T_A$              | Operating Temperature        | -40  | +85  | $^\circ\text{C}$ |

## Electrical Characteristics

Unless otherwise noted,  $V_{BUS}=2.5$  to  $23$  V,  $V_{IF}=3.1$  to  $5.5$  V,  $T_A=-40$  to  $85^{\circ}\text{C}$ ; Typical values are at  $V_{BUS}=5$  V,  $I_{IN} \leq 2$  A,  $V_{IF}=4$  V,  $C_{IN}=0.1$   $\mu\text{F}$  and  $T_A=25^{\circ}\text{C}$ .

| Symbol                                                     | Parameter                                  | Conditions                                                                                                | Min. | Typ. | Max. | Unit               |
|------------------------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------|------|------|------|--------------------|
| <b>Basic Operation</b>                                     |                                            |                                                                                                           |      |      |      |                    |
| $I_Q$                                                      | Input Quiescent Current                    | $V_{BUS}=5$ V, $ONB=0$ V, $V_{BUS\_DET}=\text{Floating}$                                                  |      | 160  | 250  | $\mu\text{A}$      |
|                                                            |                                            | $V_{IF}=4$ V                                                                                              |      | 100  | 150  | $\mu\text{A}$      |
| $I_{IN\_Q}$                                                | OVLO Supply Current                        | $V_{BUS}=12$ V, $V_{OUT}=0$ V, $V_{BUS\_DET}=\text{Floating}$                                             |      | 150  | 205  | $\mu\text{A}$      |
|                                                            |                                            | $V_{IF}=5.5$ V, $BAT=0$ V                                                                                 |      | 100  | 180  | $\mu\text{A}$      |
| $T_{SDN}$                                                  | Thermal Shutdown <sup>(3)</sup>            |                                                                                                           |      | 140  |      | $^{\circ}\text{C}$ |
| $T_{SDN\_HYS}$                                             | Thermal Shutdown Hysteresis <sup>(3)</sup> |                                                                                                           |      | 20   |      | $^{\circ}\text{C}$ |
| <b><math>V_{BUS}</math> to <math>V_{OUT}</math> Switch</b> |                                            |                                                                                                           |      |      |      |                    |
| $V_{BUS\_CLAMP}$                                           | Input Clamping Voltage                     | $I_{IN}=10$ mA                                                                                            |      | 35   |      | V                  |
| $V_{BUS\_OVLO}$                                            | Over-Voltage Trip Level                    | $V_{BUS}$ Rising, $T_A=-40$ to $85^{\circ}\text{C}$                                                       | 5.90 | 5.95 | 6.00 | V                  |
|                                                            |                                            | $V_{BUS}$ Falling, $T_A=-40$ to $85^{\circ}\text{C}$                                                      | 5.8  |      |      | V                  |
| $R_{ON\_VBUS}$                                             | On-Resistance                              | $V_{BUS}=5$ V, $I_{OUT}=1$ A, $T_A=25^{\circ}\text{C}$                                                    |      | 33   | 39   | m $\Omega$         |
|                                                            |                                            | $V_{BUS}=9$ V, $I_{OUT}=1$ A, $T_A=25^{\circ}\text{C}$                                                    |      | 33   | 39   | m $\Omega$         |
| $t_{DEB\_VBUS}$                                            | Debounce Time                              | Time from $V_{BUS\_MIN} < V_{BUS} < V_{BUS\_OVLO}$ to $V_{OUT}=0.1 \times V_{BUS}$                        |      | 15   |      | ms                 |
| $t_{START\_VBUS}$                                          | Soft-Start Time                            | Time from $V_{BUS}=V_{BUS\_MIN}$ to $0.1 \times V_{BUS\_DET}$                                             |      | 30   |      | ms                 |
| $t_{ON\_VBUS}$                                             | Switch Turn-On Time                        | $R_L=100$ $\Omega$ , $C_L=22$ $\mu\text{F}$ , $V_{OUT}$ from $0.1 \times V_{BUS}$ to $0.9 \times V_{BUS}$ |      | 3    |      | ms                 |
| $t_{OFF\_VBUS}$                                            | Switch Turn-Off Time                       | $R_L=100$ $\Omega$ , No $C_L$ , $V_{BUS} > V_{BUS\_OVLO}$ to $V_{OUT}=0.8 \times V_{BUS}$                 |      |      | 150  | ns                 |
| <b><math>V_{IF}</math> to <math>BAT</math> Switch</b>      |                                            |                                                                                                           |      |      |      |                    |
| $V_{IF\_CLAMP}$                                            | Input Clamping Voltage                     | $I_{IN}=10$ mA                                                                                            |      | 6.4  |      | V                  |
| $V_{IF\_UVLO}$                                             | Under-Voltage Trip Level                   | $V_{IF}$ Rising, $T_A=-40$ to $85^{\circ}\text{C}$                                                        |      | 2.85 | 3.05 | V                  |
|                                                            |                                            | $V_{IF}$ Falling, $T_A=-40$ to $85^{\circ}\text{C}$                                                       |      | 2.7  |      | V                  |
| $V_{IF\_OVLO}$                                             | Over-Voltage Trip Level                    | $V_{IF}$ Rising, $T_A=-40$ to $85^{\circ}\text{C}$                                                        | 5.00 | 5.25 | 5.50 | V                  |
|                                                            |                                            | $V_{IF}$ Falling, $T_A=-40$ to $85^{\circ}\text{C}$                                                       | 4.8  |      |      | V                  |
| $R_{ON\_VIF}$                                              | On-Resistance                              | $V_{IF}=3.1$ V, $I_{OUT}=1$ A, $T_A=25^{\circ}\text{C}$                                                   |      | 10   | 15   | m $\Omega$         |
| $I_{RCB}$                                                  | Reverse Current                            | $V_{IF}=0$ V, $BAT=4.4$ V                                                                                 |      | 3    | 7    | $\mu\text{A}$      |
| $t_{DEB\_VIF}$                                             | Debounce Time                              | Time from $V_{IF\_UVLO} < V_{IF} < V_{IF\_OVLO}$ to $BAT=0.1 \times V_{IF}$                               |      | 15   |      | ms                 |
| $t_{QUAL\_VIF}$                                            | Qualification Tim                          | $BAT > V_{IH\_BAT}$ First, Time from $ON > V_{IH\_ON(B)}$ to $BAT$ Voltage Increase                       |      | 2    |      | ms                 |
| $t_{ON\_VIF}$                                              | Switch Turn-On Time                        | $R_L=100$ $\Omega$ , $C_L=22$ $\mu\text{F}$ , $V_{OUT}$ from $0.1 \times V_{IF}$ to $0.9 \times V_{IF}$   |      | 2    |      | ms                 |
| $t_{OFF\_VIF}$                                             | Switch Turn-Off Time                       | $R_L=100$ $\Omega$ , No $C_L$ , $V_{IN} > V_{OVLO}$ to $V_{OUT}=0.8 \times V_{IF}$                        |      |      | 150  | ns                 |

### Note:

3. Guaranteed by characterization and design.

Continued on the following page...

**Electrical Characteristics** (Continued)

Unless otherwise noted,  $V_{BUS}=2.5$  to  $23$  V,  $V_{IF}=3.1$  to  $5.5$  V,  $T_A=-40$  to  $85^{\circ}\text{C}$ ; Typical values are at  $V_{BUS}=5$  V,  $I_{IN} \leq 2$  A,  $V_{IF}=4$  V,  $C_{IN}=0.1$   $\mu\text{F}$  and  $T_A=25^{\circ}\text{C}$ .

| Symbol                     | Parameter                            | Conditions                                                                | Min. | Typ. | Max. | Unit |
|----------------------------|--------------------------------------|---------------------------------------------------------------------------|------|------|------|------|
| V <sub>BUS_DET</sub>       |                                      |                                                                           |      |      |      |      |
| V <sub>BUS_DET</sub>       | V <sub>BUS_DET</sub> Output Voltage  | V <sub>BUS</sub> =6.5 V, I <sub>BUS_DET</sub> =0 mA, T <sub>A</sub> =25°C | 6.0  |      | 6.5  | V    |
|                            |                                      | V <sub>BUS</sub> =15 V, I <sub>BUS_DET</sub> =0 mA, T <sub>A</sub> =25°C  | 6.0  | 7.0  | 7.9  | V    |
|                            |                                      | V <sub>BUS</sub> =6.5 V, I <sub>BUS_DET</sub> =1 mA, T <sub>A</sub> =25°C | 6.0  | 6.3  | 6.5  | V    |
|                            |                                      | V <sub>BUS</sub> =15 V, I <sub>BUS_DET</sub> =1 mA, T <sub>A</sub> =25°C  | 6.0  | 7.0  | 7.9  | V    |
| Digital Signals            |                                      |                                                                           |      |      |      |      |
| V <sub>IH_ON(B)</sub>      | Enable HIGH Voltage                  | V <sub>BUS</sub> , V <sub>IF</sub> Operating Range                        | 1.2  |      |      | V    |
| V <sub>IL_ON(B)</sub>      | Enable LOW Voltage                   | V <sub>BUS</sub> , V <sub>IF</sub> Operating Range                        |      |      | 0.5  | V    |
| V <sub>IH_BAT</sub>        | BAT Presence HIGH Voltage            | BAT Rising                                                                | 2.5  |      |      | V    |
| V <sub>IL_BAT</sub>        | BAT Presence LOW Voltage             | BAT Falling                                                               |      |      | 1.7  | V    |
| I <sub>VBUS_DET_LEAK</sub> | V <sub>BUS_DET</sub> Leakage Current | V <sub>VBUS_DET</sub> =5 V, V <sub>BUS</sub> =0 V                         |      |      | 1    | μA   |
| ON(B)_Leak                 | ON(B) Leakage Current                | V <sub>BUS</sub> =5 V, V <sub>OUT</sub> =Float                            |      |      | 1    | μA   |

## Timing Diagrams

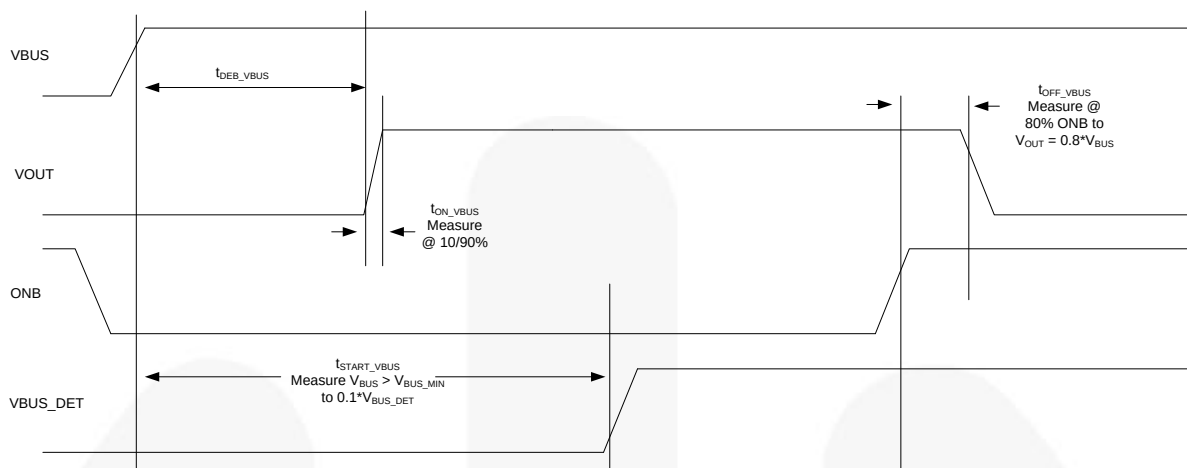


Figure 5. Timing for  $V_{BUS}$  Power Up/Down and Normal Operation

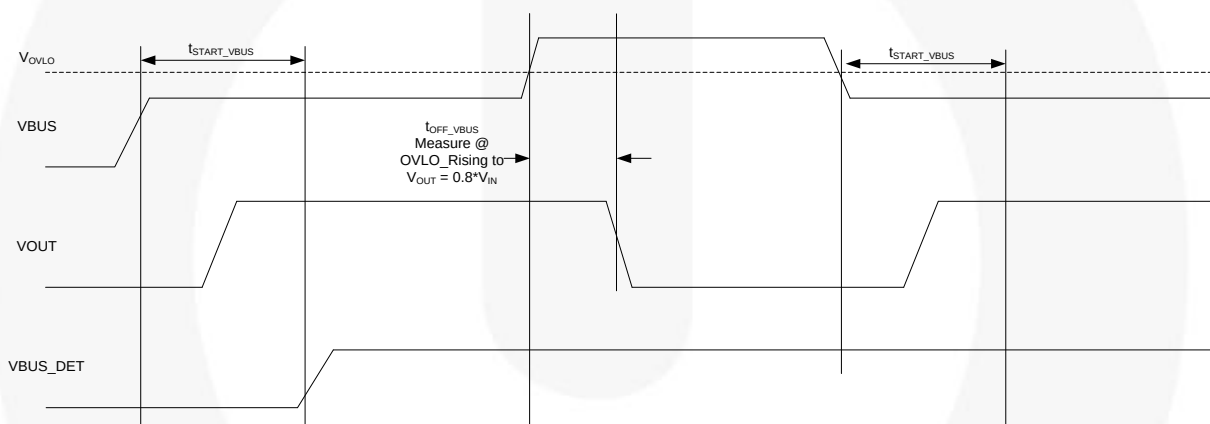


Figure 6. Timing for  $V_{BUS}$  OVLO Operation (ONB=LOW)

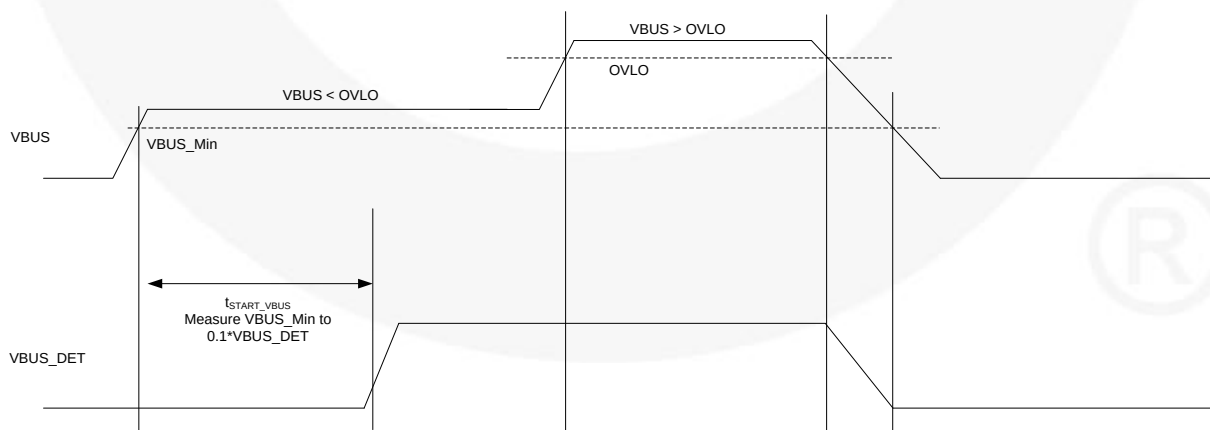


Figure 7. Always ON  $V_{BUS\_DET}$  Operation (ONB=HIGH)

## Timing Diagrams (Continued)

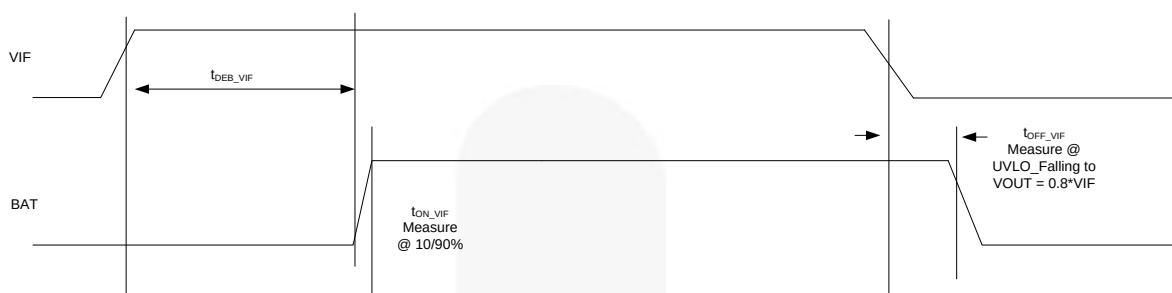


Figure 8. Timing for  $V_{IF}$  Power Up/Down and Normal Operation (ON=Don't Care)

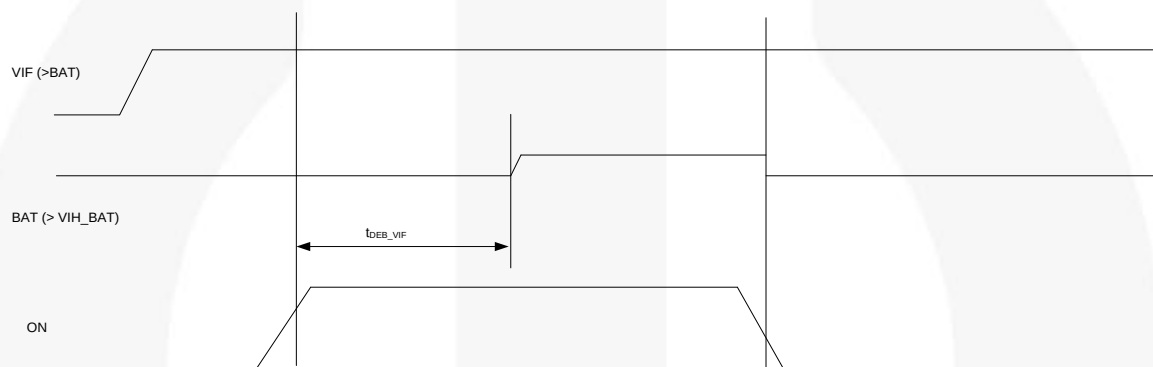


Figure 9. Timing for  $V_{IF}$  Power Up/Down and Normal Operation with ON Pin

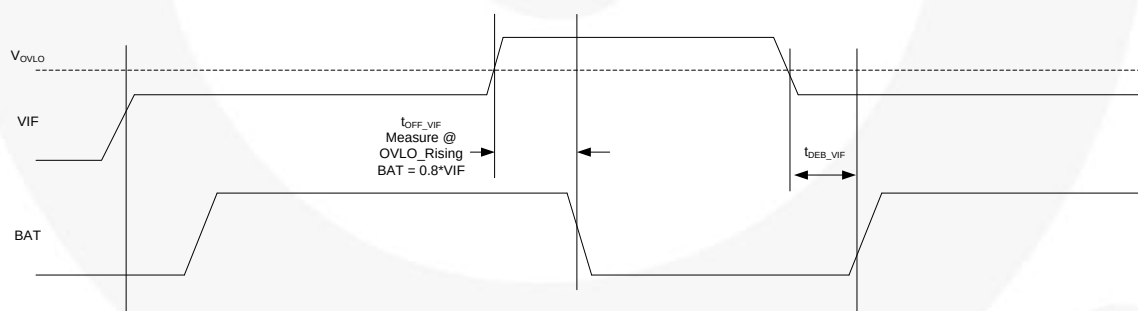


Figure 10. Timing for  $V_{IF}$  OVLO Operation (ON=Don't Care)



## V<sub>IF</sub> Turn-On Qualification State Diagram

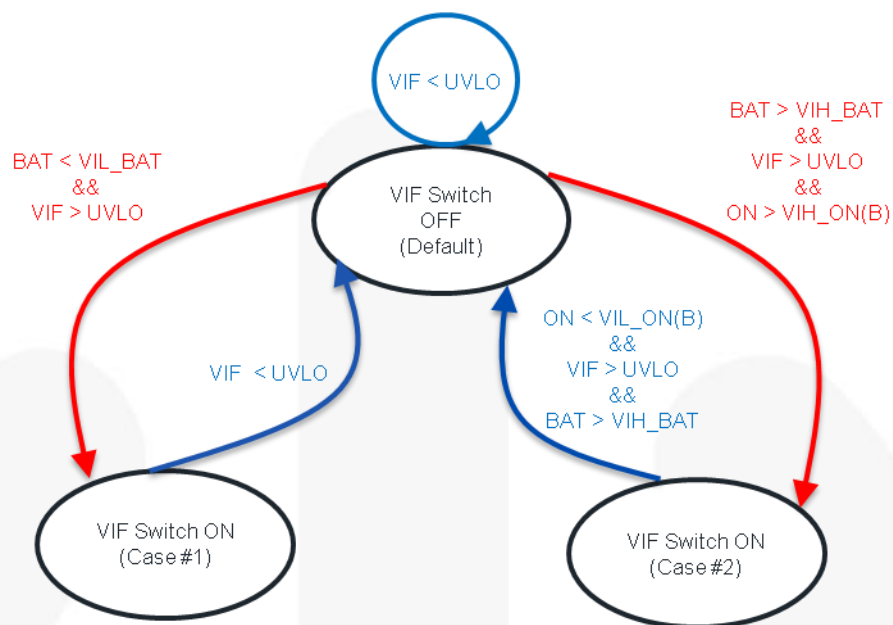


Figure 11. V<sub>IF</sub> Turn-On Qualification State Diagram

### Notes:

4. Case #1 is reflecting removable battery system without ON signal.
5. Case #2 is reflecting embedded battery system with ON signal.

## Product-Specific Package Dimensions

| D                                     | E                                     | X                                    | Y                                    |
|---------------------------------------|---------------------------------------|--------------------------------------|--------------------------------------|
| 2200 $\mu\text{m} \pm 30 \mu\text{m}$ | 1600 $\mu\text{m} \pm 30 \mu\text{m}$ | 400 $\mu\text{m} \pm 18 \mu\text{m}$ | 300 $\mu\text{m} \pm 18 \mu\text{m}$ |





## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
AttitudeEngine™  
Awinda®  
AX-CAP®\*  
BitSiC™  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™  
F®  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FastvCore™  
FETBench™  
FPS™  
F-PFS™  
FRFET®  
Global Power Resource™  
GreenBridge™  
Green FPS™  
Green FPS™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
Making Small Speakers Sound Louder and Better™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
MotionGrid®  
MTI®  
MTX®  
MVN®  
mWSaver®  
OptoHit™  
OPTOLOGIC®

OPTOPLANAR®  
Power Supply WebDesigner™  
PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QS™  
Quiet Series™  
RapidConfigure™  
Saving our world, 1mW/W/kW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
Solutions for Your Success™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™-3  
SuperSOT™-6  
SuperSOT™-8  
SupreMOS®  
SyncFET™  
Sync-Lock™

SYSTEM GENERAL®\*  
TinyBoost®  
TinyBuck®  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TranSiC™  
TriFault Detect™  
TRUECURRENT®\*  
μSerDes™  
SerDes®  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
VoltagePlus™  
XS™  
Xsens™  
仙童®

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT [HTTP://WWW.FAIRCHILDSEMI.COM](http://www.fairchildsemi.com). FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I77