

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Central Semiconductor Corp](#)
[CBRSDSH2-100 TR13](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

CBRSDSH2-100

**SURFACE MOUNT SILICON
HIGH DENSITY
2.0 AMP
SCHOTTKY BRIDGE RECTIFIER**

HDBRIDGE



SMDIP CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CBRSDSH2-100 is a full wave bridge rectifier mounted in a durable epoxy surface mount case, utilizing glass passivated chips.

MARKING: FULL PART NUMBER

FEATURES:

- High 2.0A Current Rating
- Low V_F Schottky Diodes (700mV MAX @ $I_F=2.0A$)

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

Peak Repetitive Reverse Voltage

DC Blocking Voltage

RMS Reverse Voltage

Average Forward Current ($T_A=75^\circ\text{C}$)

Peak Forward Surge Current (8.3ms)

Operating Junction Temperature

Storage Temperature

SYMBOL

V_{RRM}

100

UNITS

V

V_R

100

V

$V_{R(RMS)}$

70

V

I_O

2.0

A

I_{FSM}

110

A

T_J

-50 to +125

$^\circ\text{C}$

T_{stg}

-50 to +150

$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL **TEST CONDITIONS**

I_R $V_R=100V$

V_F $I_F=2.0A$

C_J $V_R=4.0V$, $f=1.0MHz$

TYP

1.0

650

280

MAX

50

700

500

UNITS

μA


mV

pF

CBRSDSH2-100
SURFACE MOUNT SILICON
HIGH DENSITY
2.0 AMP
SCHOTTKY BRIDGE RECTIFIER



SMDIP CASE - MECHANICAL OUTLINE

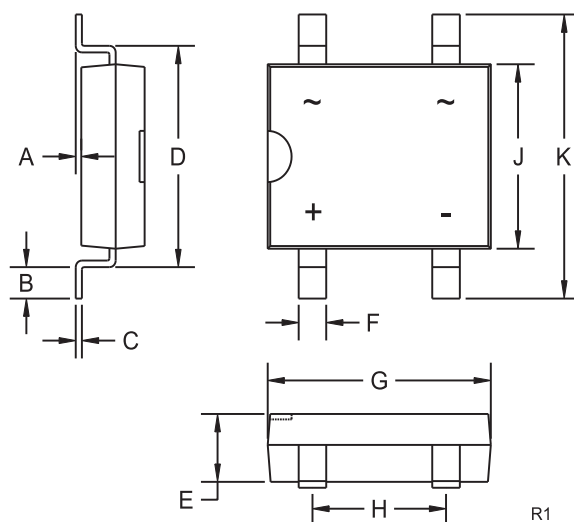

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.008	0.10	0.20
B	0.040	0.060	1.02	1.52
C	0.009		0.23	
D	0.290	0.310	7.37	7.87
E	0.086	0.098	2.18	2.49
F	0.038	0.042	0.97	1.07
G	0.316	0.335	8.03	8.51
H	0.195	0.205	4.95	5.21
J	0.245	0.255	6.22	6.48
K	0.360	0.410	9.14	10.41

SMDIP (REV: R1)





MARKING: FULL PART NUMBER

R3 (4-January 2013)

CBRSDSH2-100
SURFACE MOUNT SILICON
HIGH DENSITY
2.0 AMP
SCHOTTKY BRIDGE RECTIFIER



TYPICAL ELECTRICAL CHARACTERISTICS

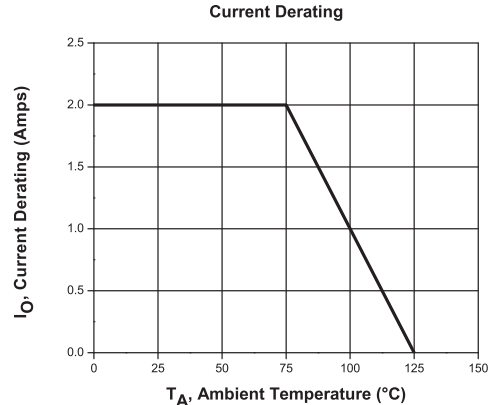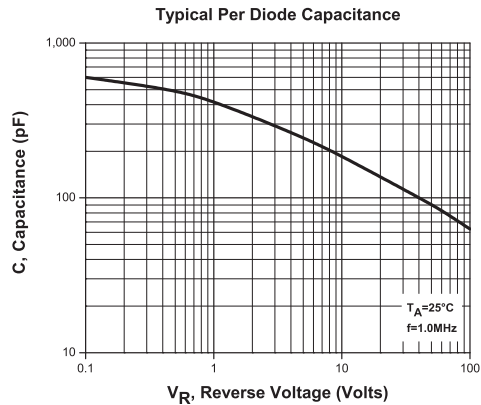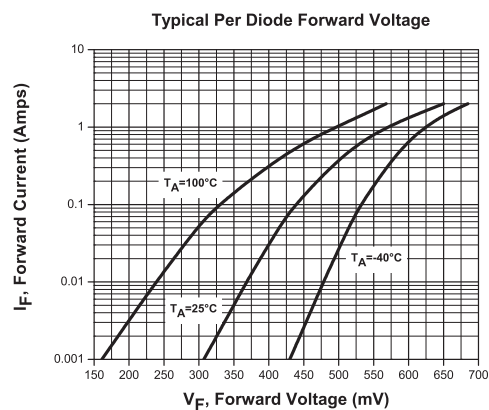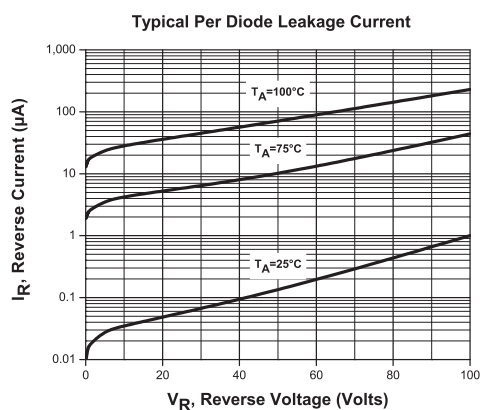

R3 (4-January 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:

www.centrasemi.com/wwreps

Worldwide Distributors:

www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms