

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Taiyo Yuden](#)
[CBC3225T221KR](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

Spec Sheet

Wire-wound Chip Power Inductors (CB series)

CBC3225T221KR

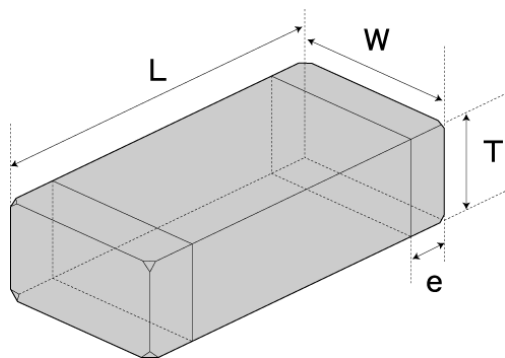

■ Features

- Item Summary
220 μ H(\pm 10%), 190mA, 190mA, 1210
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 1000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	1210/3225
Inductance	220 μ H(\pm 10%)
Inductance Measuring Frequency	0.1MHz
Rated Current -Saturation Current	190mA
Rated Current -Temperature Rise Current	190mA
DC Resistance (max)	3.25 Ω
Avg. of DC.Resistance	2.5 Ω
Self-resonant Frequency (min)	3MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	3.2mm \pm 0.2
W	2.5mm \pm 0.2
H	2.5mm \pm 0.2