

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Eaton \(formerly Cooper Bussmann\)](#)
[B0510-2R5224](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



PowerStor®

Aerogel Supercapacitors B Series

Description


The PowerStor Aerogel Capacitor is a unique, ultra-high capacitance device based on a novel type of carbon foam, known as carbon aerogel. Aerogel capacitors are similar to supercapacitors, ultracapacitors and electrochemical double layer capacitors (EDLCs) with the added benefit of low ESR (Equivalent Series Resistance).

Features & Benefits

- High specific capacitance
- Very low ESR
- Low leakage currents
- Long cycle life
- Ultra low ESR also available (A Series)

Applications

- Main power
- Hybrid battery packs
- Hold-up power
- Pulse power

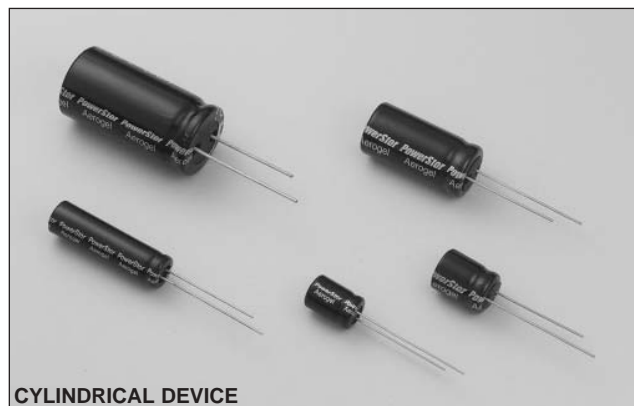

SPECIFICATIONS	
Working Voltage	2.5 volts
Surge Voltage	3.0 volts
Nominal Capacitance Range	0.22 to 50 F
Capacitance Tolerance	-20% to +80% (20°C)
Operating Temperature Range	-25°C to 70°C

STANDARD PRODUCTS			
Nominal Capacitance (F)	Part Number	Nominal ESR (Equivalent Series Resistance) Measured @ 1kHz (Ω)	Nominal Dimensions
0.22	B0510-2R5224	3	Ø = 5 mm; L = 11 mm
1.0	B0810-2R5105	0.400	Ø = 8 mm; L = 13 mm
1.5	B1010-2R5155	0.300	Ø = 10 mm; L = 12.5 mm
2.2	B0820-2R5225	0.200	Ø = 8 mm; L = 20 mm
3.3	B1020-2R5335	0.150	Ø = 10 mm; L = 20.5 mm
4.7	B0830-2R5475	0.150	Ø = 8 mm; L = 30 mm
6.8	B1030-2R5685	0.100	Ø = 10 mm; L = 30 mm
10	B1325-2R5106	0.060	Ø = 13 mm; L = 26 mm
22	B1635-2R5226	0.040	Ø = 16 mm; L = 35 mm
33	B1835-2R5336	0.030	Ø = 18 mm; L = 35 mm
50	B1840-2R5506	0.025	Ø = 18 mm; L = 40 mm

PERFORMANCE		
Parameter	Capacitance Change (% of initial measured value)	ESR (% of initial specified value)
Life (1000 hrs @ 70°C @ 2.5 volts DC)	≤ 30	≤ 300
Storage - low and high temperature (1000 hrs @ -25°C and 70°C)	≤ 30	≤ 300



Visit us on the Web at www.cooperET.com


3601 Quantum Boulevard Boynton Beach, Florida 33426-8638
Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178



PowerStor®
Aerogel Supercapacitors
B Series

DIMENSIONS (mm)								
Part Number	D	D'	L	L'	F	d'	C	C'
B0510-2R5224	5.0	5.5	11.5	12.0	2.0	0.50	20.0	5.0
B0810-2R5105	8.0	8.5	13.0	13.5	3.5	0.50	20.0	5.0
B1010-2R5155	10.0	10.5	13.9	14.4	5.0	0.60	20.0	5.0
B0820-2R5225	8.0	8.5	20.5	21.0	3.5	0.50	20.0	5.0
B1020-2R5335	10.0	10.5	21.8	22.3	5.0	0.60	20.0	5.0
B0830-2R5475	8.0	8.5	30.5	31.0	3.5	0.50	20.0	5.0
B1030-2R5685	10.0	10.5	31.0	31.5	5.0	0.60	20.0	5.0
B1325-2R5106	13.0	13.5	27.9	28.4	5.0	0.60	20.0	5.0
B1635-2R5226	16.0	16.5	37.5	38.0	7.5	0.80	20.0	5.0
B1835-2R5336	18.0	18.5	37.5	38.0	7.5	0.80	20.0	5.0
B1840-2R5506	18.0	18.5	41.5	42.0	7.5	0.80	20.0	5.0
Maximum					± 0.5	± 0.02	Minimum	

Note: Longer lead is positive

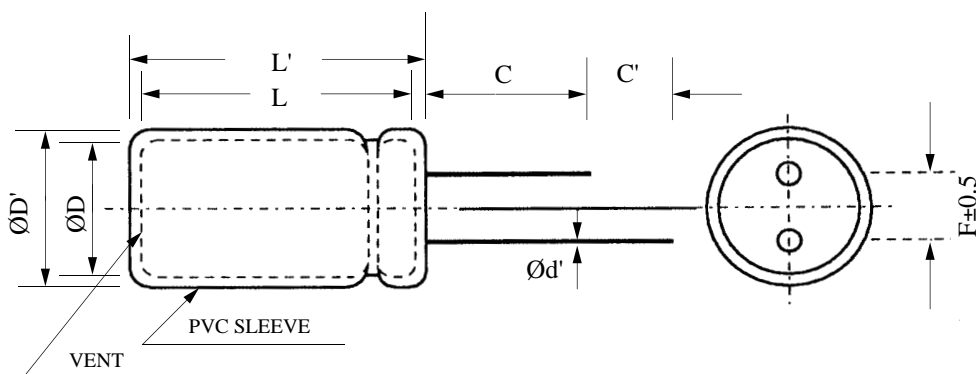

PART NUMBERING SYSTEM								
B	□	□	□	□	-	2	R	5
Series Code	Dimensions (mm)					Voltage (V)		Capacitance
B = High Capacitance	Diameter	Length				R is decimal		Value Multiplier
						2R5 = 2.5V		Example: 475 = 47 x 10 ⁵ μF or 4.7 F

PACKAGING INFORMATION

Standard packaging: Bulk, 100 units per package.

Special packaging available upon request. Contact factory.

PART MARKING

Manufacturer
Capacitance (F)
Max. Operating Voltage (V)
Series Code (or part number)
Polarity Marking



PS-5102 9/02

Visit us on the Web at www.cooperET.com

© Cooper Electronic Technologies 2002

3601 Quantum Boulevard Boynton Beach, Florida 33426-8638

Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.