

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0397180009](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

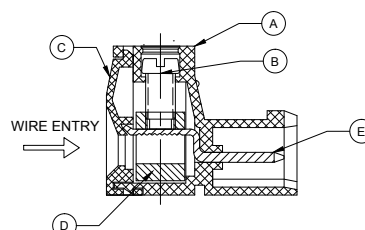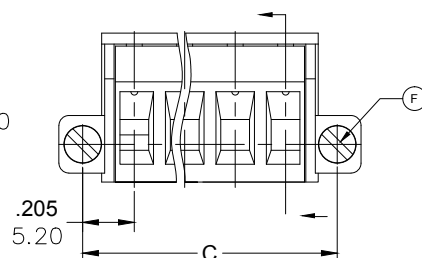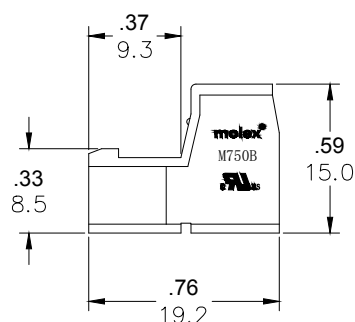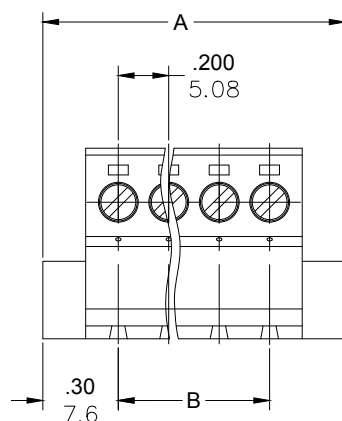

ENGINEERING NUMBER LEGEND

M750B-22-2-XX-3

SERIES _____ COLOR _____
 STYLE _____ POLES _____
 PITCH _____
 CONTACT FACTORY FOR OPTIONAL COLORS

CONTACT FACTORY FOR OPTIONAL COLORS

SPECIFICATIONS

1. MATERIAL:

- A. BODY : PA66.UL94 V-0
B. SCREW: M3.0, STEEL.ZINC PLATED
C. COVER: PA66.UL94 V-0
D. CAGE: BRASS.NI PLATED
E. TERMINAL: BRASS.TIN PLATED
F. SCREW: M2.5, STEEL.ZINC PLATED

2. WIRE SIZE: 24 TO 12AWG
3. RATING: 250V, 12A
4. MAX TORQUE : 4.4 IN LBS.
5. WIRE STRIP LENGTH: .20 in. (5.0mm)
6. OPERATING TEMPERATURE: -40°C TO +105°C
7. DIMS. SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO. IP62014-1781 DRAWN: RSTONE 2014/04/23 CHKD: G FARNSWORTHY APPR: J. DEJURPHY 2014/10/16 A	DESCRIPTION I 1	QUALITY SYMBOL ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				mm INCH	IN/MM		---	METRIC		
			4 PLACES	±---	±---	DRAWN BY	DATE	TITLE		
			3 PLACES	±---	±.005	RSTONE	2014/04/29	RECEPTACLE PLUG-HORIZ		
			2 PLACES	±---	±.01	CHECKED BY	DATE	5.08MM WITH		
			1 PLACE	±.03	±.01	---	---	MOUNTING ENDS		
			ANGULAR ±---		APPROVED BY		DATE			
					JFMURPHY		2014/10/16	MOLEX INCORPORATED		
			DRAFT WHERE APPLICABLE		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
			MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-39718-001		1 OF 1	
					SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
					C					