

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0397180010](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

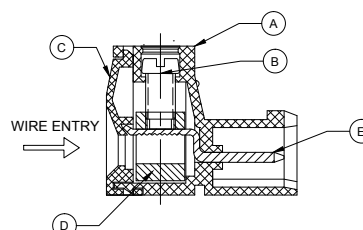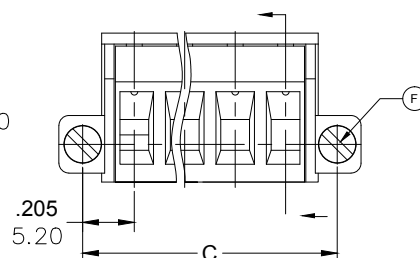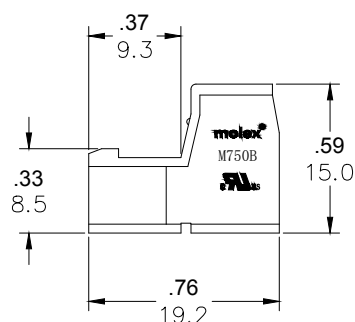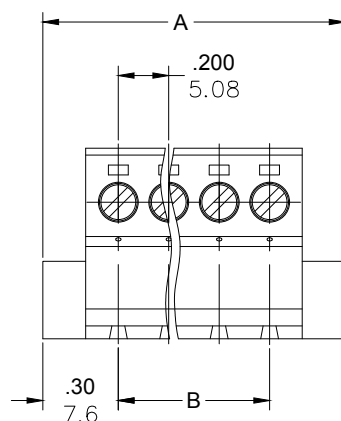

ENGINEERING NUMBER LEGEND

M750B-22-2-XX-3

SERIES _____ COLOR _____
STYLE _____ POLES _____
RITCH _____

CONTACT FACTORY FOR OPTIONAL COLORS

SPECIFICATIONS

1. MATERIAL:

- A. BODY : PA66.UL94 V-0
B. SCREW: M3.0, STEEL.ZINC PLATED
C. COVER: PA66.UL94 V-0
D. CAGE: BRASS.NI PLATED
E. TERMINAL: BRASS.TIN PLATED
F. SCREW: M2.5. STEEL.ZINC PLATED

2. WIRE SIZE: 24 TO 12AWG
3. RATING: 250V, 12A
4. MAX TORQUE : 4.4 IN LBS.
5. WIRE STRIP LENGTH: .20 in. (5.0mm)
6. OPERATING TEMPERATURE: -40°C TO +105°C
7. DIMS. SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO. IP62014-1781 DRAWN: RSTONE 2014/04/23 CHK'D: G FARNSW APPR: JEMURPHY 2014/10/16 A	DESCRIPTION EV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		 	mm 4 PLACES $\pm$ --- 3 PLACES $\pm$ --- 2 PLACES ± 0.13 1 PLACE ± 0.3	INCH 4 PLACES $\pm$ --- 3 PLACES ± 0.005 2 PLACES ± 0.01 1 PLACE $\pm$ ---	DRAWN BY RSTONE	DATE 2014/04/29	TITLE RECEPTACLE PLUG-HORIZ 5.08MM WITH MOUNTING ENDS		
		ANGULAR $\pm$ ---		CHECKED BY ---	DATE ---				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY JFMURPHY	DATE 2014/10/16	 MOLEX INCORPORATED			
				MATERIAL NO. SEE CHART	DOCUMENT NO. SD-39718-001	SHEET NO. 1 OF 1			