

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0397220010](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

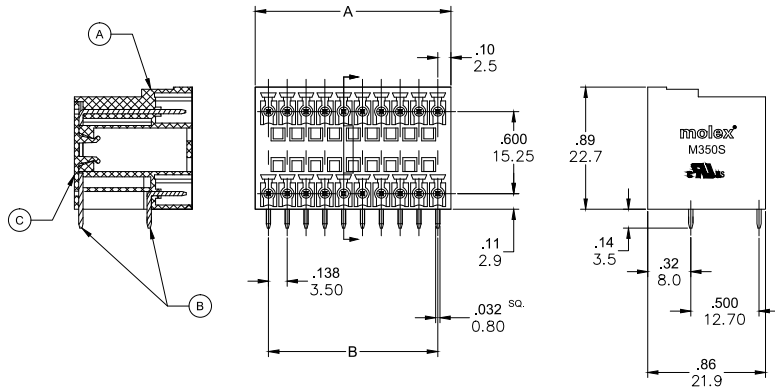

PART NUMBER DATA						
CIRCUITS	PART NO. GREEN	ENGINEERING NUMBER	PART NO. BLACK (B)	ENGINEERING NUMBER	A IN mm	B IN mm
2	397220002	M350S-18-02-3			.33	8.4
3	397220003	M350S-18-03-3			.47	11.9
4	397220004	M350S-18-04-3			.61	15.4
5	397220005	M350S-18-05-3			.74	18.9
6	397220006	M350S-18-06-3			.88	22.4
7	397220007	M350S-18-07-3			1.02	25.9
8	397220008	M350S-18-08-3			1.16	29.4
9	397220009	M350S-18-09-3			1.30	32.9
10	397220010	M350S-18-10-3	397220110	M350S-18-10-1	1.43	36.4
11	397220011	M350S-18-11-3			1.57	39.9
12	397220012	M350S-18-12-3	397220112	M350S-18-12-1	1.71	43.4
13	**	M350S-18-13-3			1.85	46.9
14	**	M350S-18-14-3			1.98	50.4
15	**	M350S-18-15-3			2.12	53.9
16	**	M350S-18-16-3			2.26	57.4
17	**	M350S-18-17-3			2.40	60.9
18	**	M350S-18-18-3			2.54	64.4
19	**	M350S-18-19-3			2.67	67.9
20	**	M350S-18-20-3			2.81	71.4

REF. LAST 2 DIGITS OF PART NUMBER EQUALS NUMBER OF POLES

ENGINEERING NUMBER LEGEND

M350S-18-XX-*

SERIES STYLE POLES COLOR
1= BLACK (B)
3= GREEN

** CONTACT FACTORY FOR ADDITIONAL LENGTHS AND COLORS

SPECIFICATIONS

1. MATERIAL:

A BODY: PA66, UL 94V-0

B TERMINALS: BRASS, TIN PLATED

C COVER: PA66, UL 94V-0

2. RATING: 300V, 8A

3. INSULATION RESISTANCE: DC 500V, 500MΩ

4. DIELECTRIC WITHSTAND: AC 2000V / 1 MINUTE

5. OPERATING TEMPERATURE: -40°C TO +105°C

6. MAX SOLDERING TEMPERATURE: +260°C FOR 5 SEC.

7. MATES WITH TERMINAL PLUG SERIES: 39500, 39503

8. DIMS SHOWN ARE FOR REFERENCE ONLY

ADD PINS FOR BLACK EC NO: JPC2015-1575 3/6/15 DRWN: RSTONE CHKD: G. FARNS APPR: JFMURPHY 2014/10/16 B	DESCRIPTION QUALITY SYMBOL ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm INCH		DRAWN BY RSTONE	DATE 2014/01/21	TITLE 3.50MM EURO HEADER RIGHT ANGLE DUAL ROW		
		4 PLACES ±--- ±---		CHECKED BY G. FARNS	DATE ---	---		
		3 PLACES ±--- ±.005		APPROVED BY JFMURPHY		DATE 2014/10/16	MOLEX INCORPORATED	
		2 PLACES ±0.13 ±.01		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-39722-001	SHEET NO. 1 OF 1	
		1 PLACE ±0.3 ±---		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		ANGULAR ±---						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						