

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0397260011](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

PART NUMBER DATA




CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm	B IN mm	C IN mm			
2	397260002	M750S-05-5-02-3	GREEN	1.32	33.4	.300	7.62	0.78	19.8
3	397260003	M750S-05-5-03-3	GREEN	1.62	41.1	.600	15.24	1.08	27.4
4	397260004	M750S-05-5-04-3	GREEN	1.92	48.7	.900	22.86	1.38	35.1
5	397260005	M750S-05-5-05-3	GREEN	2.22	56.3	1.200	30.48	1.68	42.7
6	397260006	M750S-05-5-06-3	GREEN	2.52	63.9	1.500	38.10	1.98	50.3
7	397260007	M750S-05-5-07-3	GREEN	2.82	71.5	1.800	45.72	2.28	57.9
8	397260008	M750S-05-5-08-3	GREEN	3.12	79.2	2.100	53.34	2.58	65.5
9	397260009	M750S-05-5-09-3	GREEN	3.42	86.8	2.400	60.96	2.88	73.1
10	397260010	M750S-05-5-10-3	GREEN	3.72	94.4	2.700	68.58	3.18	80.8
11	397260011	M750S-05-5-11-3	GREEN	4.02	102.0	3.000	76.20	3.48	88.4
12	397260012	M750S-05-5-12-3	GREEN	4.32	109.6	3.300	83.82	3.78	96.0

REF. LAST 2 DIGITS OF PART NUMBER EQUALS NUMBER OF POLES

ENGINEERING NUMBER LEGEND



CONTACT FACTORY FOR OPTIONAL COLORS

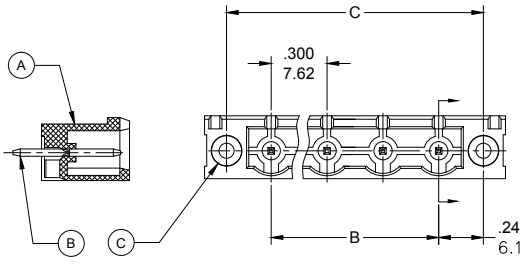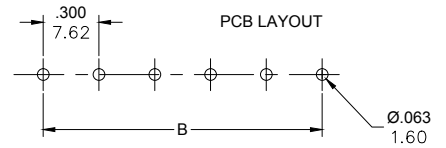

SPECIFICATIONS:

- MATERIAL:
  - BODY: PA66, UL94 V-0
  - TERMINAL: BRASS, TIN PLATED
  - THREADED INSERT: M2.5, BRASS
- RATING: 15A AT 51-150V, 10A AT 151 TO 300V
- OPERATING TEMPERATURE: -40°C + 105°C
- DIELECTRIC VOLTAGE WITHSTAND: AC 2500V FOR 1 MINUTE.
- INSULATION RESISTANCE: DC 500V, 500MΩ.
- RATED IMPULSE VOLTAGE: 4000V, PLUS AND MINUS 5 TIMES EACH.
- MAX. SOLDERING TEMPERATURE: +260°C FOR 5 SEC.
- MATES WITH TERMINAL PLUG SERIES: 39705
- DIMS SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO: IPG/2014/1194 DRAWN: RSTONE 2014/01/23 CHECKED: G. FARNS APPR: JFMURPHY 2014/10/16 DESIGNED: JFMURPHY	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	▽=0 ∇=0	4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.01 1 PLACE ±0.3 ±--- ANGULAR ±---°	DRAWN BY RSTONE DATE 2014/01/23 CHECKED BY G. FARNS DATE --- APPROVED BY JFMURPHY DATE 2014/10/16 MATERIAL NO. --- DOCUMENT NO. ---	TITLE	7.62MM EURO HEADER WITH VERTICAL MOUNTING ENDS	MOLEX INCORPORATED
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-39726-001		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						