

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0397610007](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

F

E

D

C

B

A

F


E

D

C

B

A

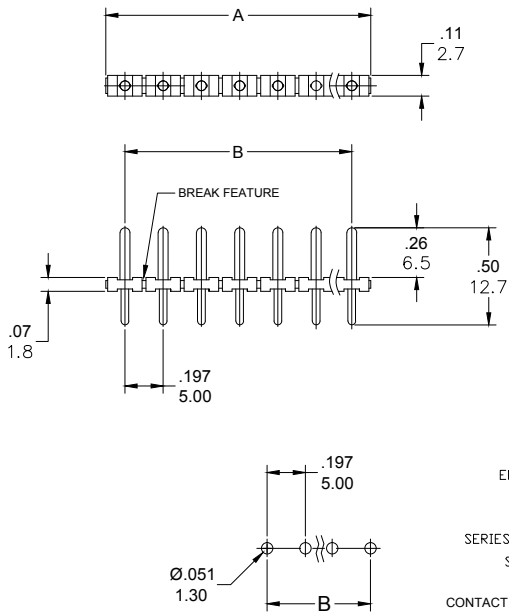

PCB LAYOUT

SPECIFICATIONS

1. MATERIAL:

- A. BODY: PA66, UL94V-0
- B. TERMINAL: BRASS, TIN PLATED

2. RATING: 300V, 10A

3. OPERATING TEMPERATURE: -40°C TO +105°C

4. MAX SOLDERING: 260°C (+500°F) FOR 5 SECONDS

5. DIMS SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO./P/2015-0082 DRAWN: RSTONE CHKD: G FARNSW APPR: JFMURPHY	DESCRIPTION 2014/07/28 2014/10/16	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	
					IN/MM			METRIC		
				mm	INCH	DRAWN BY	DATE	TITLE		
			4 PLACES	±.005	±.005	RSTONE	2014/07/28	PIN HEADER BREAKABLE		5.00MM, VERTICAL
			3 PLACES	±.005	±.005	CHECKED BY	DATE			1.30MM PIN DIA
			2 PLACES	±0.13	±.01	G FARNSW	—			
			1 PLACE	±0.3	±.01	APPROVED BY	DATE			
			ANGULAR ±.005°		JFMURPHY	2014/10/16		MOLEX INCORPORATED		
					MATERIAL NO.	DOCUMENT NO.				
					SEE CHART		SD-39761-001			SHEET NO.
1	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 1				