

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0225-07-TNC-02](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 ATTENUATION ACCURACY:
- 1 to 6dB ±0.3dB
- 7 to 20dB ±0.5dB
- 21 to 40dB ±1.0dB
- 41 to 60dB ±1.5dB
- 1.3 IMPEDANCE: 50 OHMS
- 1.4 MAXIMUM VSWR: 1.07+0.015f(GHz)
- 1.5 MAXIMUM INPUT POWER: 2 WATTS AVG.
AT +25°C DERATED LINEARLY TO
0.5 WATTS AT +125°C.
- 1.6 OPERATING TEMP. RANGE:
-54°C to +125°C

2.0 MARKING: (MARK UNIT AS SHOWN)
(REF.: INK-03339-27-XX)

21-60	1.86
1-20	1.57
(dB)	
ATTEN.	DIM A

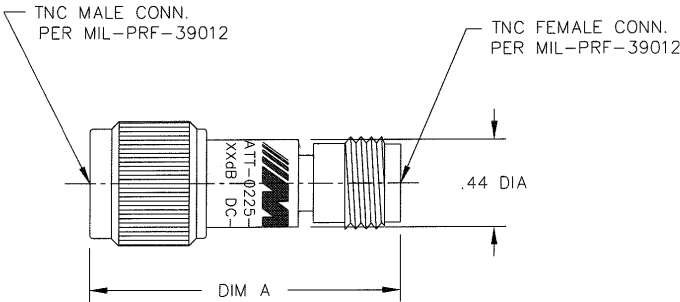

DWG NO. WAS: 02368-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/21/79
A	ECR 1888	12/10/82
B	ECR 6545	6/29/89
C	ECN 10356	4/22/91
D	ECN 11779	4/30/92
DI	ADDED TITLEBLOCK	3/21/05
E	ECN 20401	4/19/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO.		34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave				TITLE ATTENUATOR	
	3 PLACE DECIMALS ±.005					
	2 PLACE DECIMALS ±.02					
	FRACTIONS ±1/64					
PARALLELITY: T.I.R. _____	DRAWN/DATE A. BEATTY 4/30/92		ENG/DATE G. KOZAK 5/6/92		DRAWING NUMBER ATT-0225-XX-TNC-02	
FLATNESS: T.I.R. _____	CHECKED/DATE		APPROVED/DATE			
CONCENTRICITY: T.I.R. _____						SCALE: 3=1
ANGLES AND PERPENDICULARITY: ±1°						SHEET 1 of 1