

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0225-40-TNC-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC to 18.0 GHz

1.2 ATTENUATION ACCURACY:

1 to 6dB ±0.3dB

7 to 20dB ±0.5dB

21 to 40dB ±1.0dB

41 to 60dB ±1.5dB

1.3 IMPEDANCE: 50 OHMS

1.4 MAXIMUM VSWR: 1.07+0.015f(GHz)

1.5 MAXIMUM INPUT POWER: 2 WATTS AVG.

AT +25°C DERATED LINEARLY TO


0.5 WATTS AT +125°C.

1.6 OPERATING TEMP. RANGE:

-54°C to +125°C

2.0 MARKING: (MARK UNIT AS SHOWN)

(REF.: INK-03339-27-XX)

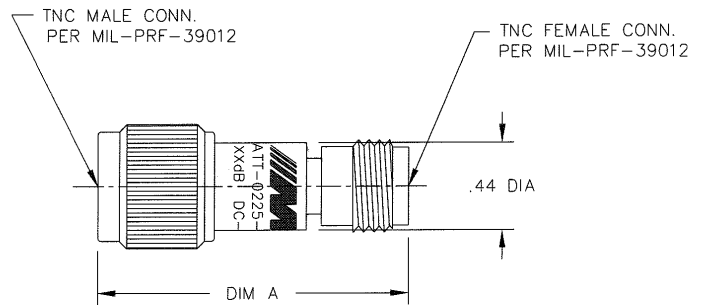

21-60	1.86
1-20	1.57
(dB)	
ATTEN.	DIM A

DWG NO. WAS: 02368-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/21/79
A	ECR 1888	12/10/82
B	ECR 6545	5/29/89
C	ECN 10356	4/22/91
D	ECN 11779	4/30/92
DI	ADDED TITLEBLOCK	3/21/05
E	ECN 20401	4/19/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO.		34078 MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE ATTENUATOR	
2 PLACE DECIMALS ±.02					
FRACTIONS ±1/64					
PARALLELITY: T.I.R. _____					
FLATNESS: T.I.R. _____		DRAWN/DATE A.BEATTY 4/30/92		ENG/DATE G.KOZAK 5/6/92	
CONCENTRICITY: T.I.R. _____		CHECKED/DATE		APPROVED/DATE	
ANGLES AND PERPENDICULARITY: ±1°				DRAWING NUMBER ATT-0225-XX-TNC-02	
				SCALE: 3=1	
				SHEET 1 of 1	