

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0263-10-SMA-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC to 18.0 GHz

1.2 ATTENUATION VALUES AND ACCURACY:

1.2.1	0 dB	+0.3 dB
1.2.2	1 to 10 dB	±0.3 dB
1.2.3	11 to 20 dB	±0.5 dB
1.2.4	21 to 40 dB	±1.0 dB
1.2.5	41 to 60 dB	±1.5 dB

1.3 VSWR: 1.07 + .015f (GHz)


2.0 MAXIMUM INPUT POWER:

2 WATTS AVERAGE AT +25°C DERATED LINEARLY
TO 0.5 WATTS AT +125°C

3.0 OPERATING TEMPERATURE RANGE: -65°C TO +125°C

4.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-03803-27-XX)

5.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

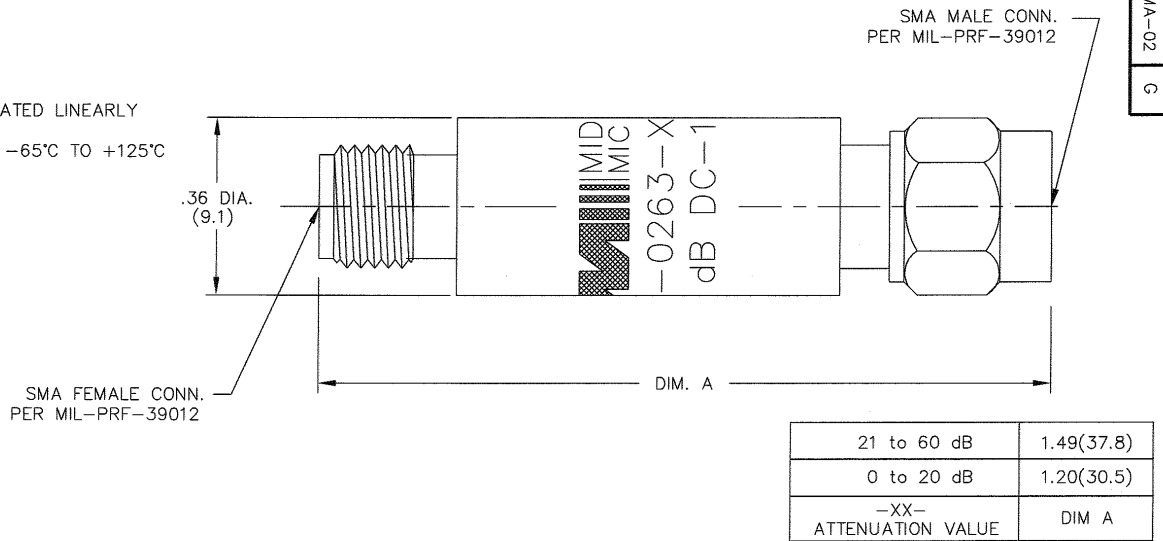

WAS DWG. 02332-01-00

ATT-0263-XX-000-02 AND ATT-0263-XX-SMA-02
ARE IDENTICAL MARKING SHOULD MATCH MODEL
NUMBER AS IT APPEARS ON PURCHASE ORDER.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE	
2 PLACE DECIMALS ±.02				MINIATURE ATTENUATOR	
FRACTIONS ±1/64				DRAWING NUMBER	
PARALLELITY: T.I.R. _____		DRAWN/DATE D. ESTY 8/15/90		ATT-0263-XX-SMA-02	
FLATNESS: T.I.R. _____		ENG./DATE G. KOZAK 8/26/90		APPROVED/DATE	
CONCENTRICITY: T.I.R. _____		CHECKED/DATE A. BEATTY 8/26/90		SCALE: 5=1	
ANGLES AND PERPENDICULARITY: ±1°				SHEET 1 of 1	

REV.	DESCRIPTION	DATE
-	RELEASED	8/26/90
A	ECR 3656	6/17/95
B	ECR 4003	11/1/95
C	ECR 4689	7/24/96
D	ECR 6546	7/20/99
E	ECR 6933	8/17/90
E1	CORRECT MARKING	4/25/91
E2	UPDATE MODEL NO.	8/20/92
F	EON 12471	10/1/93
G	EON 20115	10/5/04