

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0263-11-SMA-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC to 18.0 GHz

1.2 ATTENUATION VALUES AND ACCURACY:

1.2.1 0 dB ± 0.3 dB

1.2.2 1 to 10 dB ± 0.3 dB

1.2.3 11 to 20 dB ± 0.5 dB

1.2.4 21 to 40 dB ± 1.0 dB

1.2.5 41 to 60 dB ± 1.5 dB

1.3 VSWR: 1.07 + .015f (GHz)

2.0 MAXIMUM INPUT POWER:

2 WATTS AVERAGE AT +25°C DERATED LINEARLY


TO 0.5 WATTS AT +125°C

3.0 OPERATING TEMPERATURE RANGE: -65°C TO +125°C

4.0 MARKING: MARK UNIT AS SHOWN

(REF.: INK-03803-27-XX)

5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

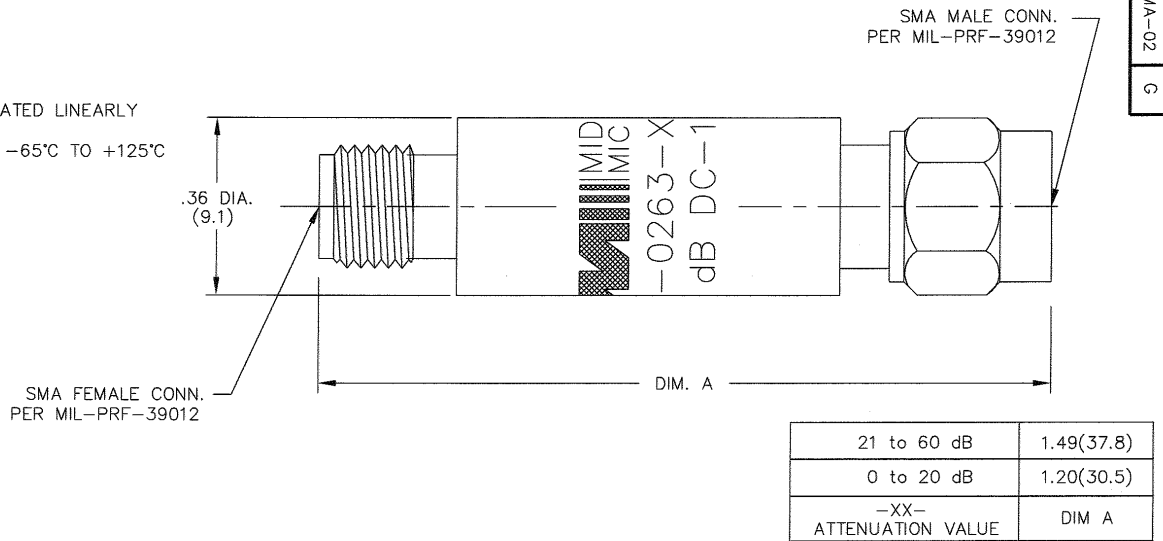

WAS DWG. 02332-01-00

ATT-0263-XX-000-02 AND ATT-0263-XX-SMA-02
ARE IDENTICAL MARKING SHOULD MATCH MODEL
NUMBER AS IT APPEARS ON PURCHASE ORDER.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		34078 MIDWEST MICROWAVE	
3 PLACE DECIMALS $\pm .005$ 2 PLACE DECIMALS $\pm .02$ FRACTIONS $\pm 1/64$ PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: $\pm 1^\circ$		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	
DRAWN/DATE D. ESTY 8/15/90		ENG./DATE G. KOZAK 8/26/90	
CHECKED/DATE A. BEATTY 8/26/90		APPROVED/DATE	
TITLE MINIATURE ATTENUATOR		DRAWING NUMBER ATT-0263-XX-SMA-02	
SCALE: 5=1		SHEET 1 of 1	