

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[ATT-0263-73-SMA-02](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
1.1 FREQUENCY RANGE: DC to 18.0 GHz
1.2 ATTENUATION VALUES AND ACCURACY:
1.2.1 0 dB ± 0.3 dB
1.2.2 1 to 10 dB ± 0.3 dB
1.2.3 11 to 20 dB ± 0.5 dB
1.2.4 21 to 40 dB ± 1.0 dB
1.2.5 41 to 60 dB ± 1.5 dB
1.3 VSWR: 1.07 + .015f (GHz)
2.0 MAXIMUM INPUT POWER:
2 WATTS AVERAGE AT +25°C DERATED LINEARLY
TO 0.5 WATTS AT +125°C
3.0 OPERATING TEMPERATURE RANGE: -65°C TO +125°C
4.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-03803-27-XX)
5.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

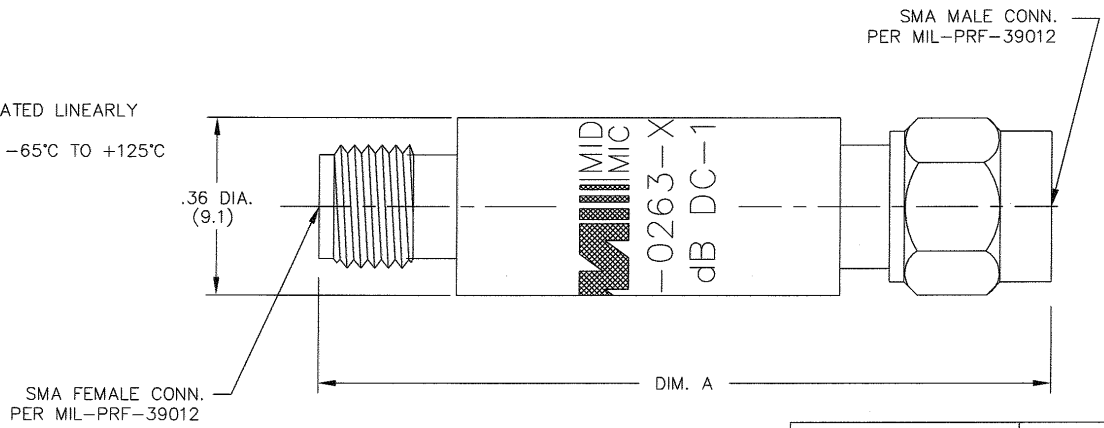

21 to 60 dB	1.49(37.8)
0 to 20 dB	1.20(30.5)
-XX- ATTENUATION VALUE	DIM A

WAS DWG. 02332-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	8/26/90
A	ECR 3656	6/17/95
B	ECR 4003	11/1/95
C	ECR 4689	7/24/96
D	ECR 6546	7/20/99
E	ECR 6933	8/17/90
E1	CORRECT MARKING	4/29/91
E2	UPDATE MODEL NO.	8/20/92
F	EON 12471	10/1/93
G	EON 20115	10/5/04

ATT-0263-XX-000-02 AND ATT-0263-XX-SMA-02
ARE IDENTICAL MARKING SHOULD MATCH MODEL
NUMBER AS IT APPEARS ON PURCHASE ORDER.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FIG. NO.	34078 <i>MIDWEST MICROWAVE</i>			
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE MINIATURE ATTENUATOR		
3 PLACE DECIMALS ±.005	DRAWN/DATE D. ESTY 8/15/90		ENG./DATE G. KOZAK 8/26/90		DRAWING NUMBER ATT-0263-XX-SMA-02
2 PLACE DECIMALS ±.02					
FRACTIONS ±1/64	CHECKED/DATE A. BEATTY 8/26/90		APPROVED/DATE		SCALE: 5=1
PARALLELITY: T.I.R. _____					
FLATNESS: T.I.R. _____	SHEET 1 of 1				
CONCENTRICITY: T.I.R. _____					
ANGLES AND PERPENDICULARITY: ±1'					