

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0292-20-SMA-02](#)


For any questions, you can email us directly:
sales@integrated-circuit.com



MODEL NUMBER
 ATT-0292-XX-SMA-02
 REV.
 S

NOTES:

- 1.0 SPECIFICATIONS:
 - 1.1 FREQ. RANGE: DC to 8.0 GHz
 - 1.2 ATTENUATION ACCURACY:
 - 0dB +0.3/-0dB
 - 0.5 - 6dB ±0.3dB
 - 7 - 20dB ±0.5dB
 - 21 - 30dB ±1.0dB
 - 1.3 MAXIMUM VSWR: 1.07 + .015 f (GHz)
 - 1.4 MAXIMUM INPUT POWER: 2 WATTS AVG
 AT +25°C DERATED LINEARLY TO
 0.5 WATTS AT +125°C
 - 1.5 OPERATING TEMP. RANGE: -65°C to +125°C
- 2.0 MARKING
 - 2.1 MARK UNIT AS SHOWN
 (REF.: INK-03812-27-XX)
- 3.0 EPOXY UNIT AS SHOWN (REF.; EPX-08000-44-01)
- 4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

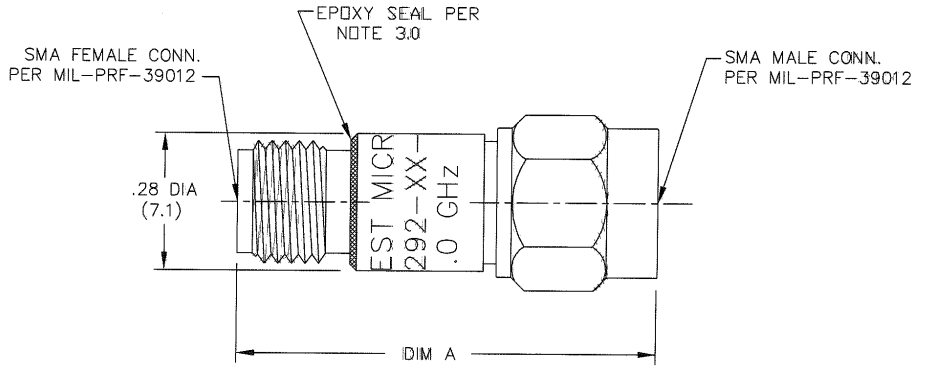

| ATTENUATION VALUE | DIM A |
|-------------------|------------|
| 0-12dB | .86(21.8) |
| 13-30dB | 1.02(25.9) |

NOTE:
 ATT-0292-XX-000-02 AND ATT-0292-XX-SMA-02
 ARE IDENTICAL. MARKING SHOULD MATCH MODEL
 NUMBER AS IT APPEARS ON PURCHASE ORDER.

SEE HISTORY FILE FOR REV. HISTORY

DWG NO. WAS: 02333-01-00

| REV. | DESCRIPTION | DATE |
|------|----------------|---------|
| I | RELEASED | 10/2/92 |
| M | ECN 6833 | 1/26/90 |
| MI | SHOW CORR. P/N | 2/15/90 |
| N | ECN 10832 | 9/3/91 |
| O | REDRAW ON CAD | 9/29/92 |
| P | ECN 12471 | 10/6/93 |
| R | ECN 19049 | 2/24/93 |
| S | ECN 21171 | 1/5/07 |

| | | |
|---|---|---------------------------------|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1° | FSM NO. 34078 | MIDWEST MICROWAVE |
| | NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave | |
| | TITLE ATTENUATOR | |
| | DRAWN/DATE A. BEATTY 9/29/92 | ENG/DATE G. KOZAK 10/1/92 |
| CHECKED/DATE APPROVED/DATE | | SCALE: 5=1 SHEET 1 of 1 |