



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0313-00-BNC-10](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

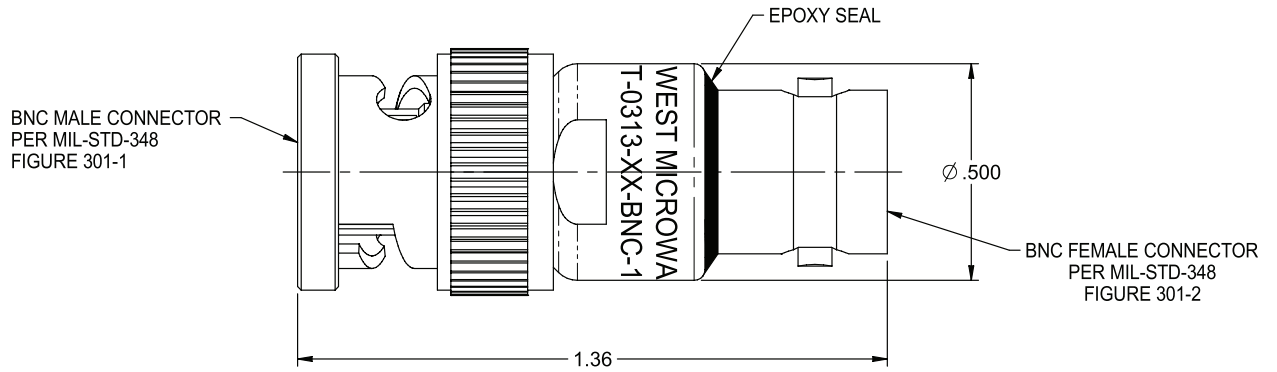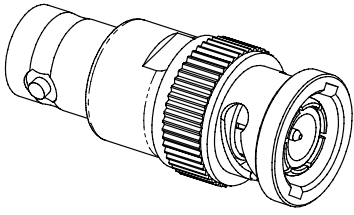

NOTES: UNLESS OTHERWISE SPECIFIED.

1. SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC TO 4.0 GHz
 - 1.2 ATTENUATION & ACCURACY:
 - 0 dB: +0.3/-0 dB
 - 1-6 dB: ±0.3 dB
 - 7-20 dB: ±0.5 dB
 - 21-30 dB: ±0.8 dB
 - 1.3 IMPEDANCE: 50 OHM
 - 1.4 VSWR (MAX): 1.25:1
 - 1.5 MAXIMUM INPUT POWER: 2 WATTS AVG. AT 25°C
DERATED LINEARLY TO 0.5 WATTS AT 125°C
 - 1.6 OPERATING TEMP. RANGE: -55°C TO 125°C
 - 1.7 FINISH: NICKEL PLATED BRASS.

		Midwest Microwave	
	RoHS <input checked="" type="checkbox"/> 2002/95/EC	Title: BNC ATTENUATOR, 0-30 dB	
<small>THIS PROPRIETARY DOCUMENT IS THE PROPERTY OF CINCH CONNECTIVITY SOLUTIONS. IT IS CONFIDENTIAL IN NATURE, NON-TRANSFERABLE, AND SHALL REMAIN THE PROPERTY OF CINCH CONNECTIVITY SOLUTIONS. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE ORDER. REPRODUCTION OR DISSEMINATION IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM CINCH CONNECTIVITY SOLUTIONS.</small>	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.005 ANGLES ±2°	Model No. ATT-0313-XX-BNC-10	
<small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009</small>	Size A	DO NOT SCALE DRAWING	Date: 5/8/2013 Sheet 1 of 1