

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0313-05-BNC-10](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

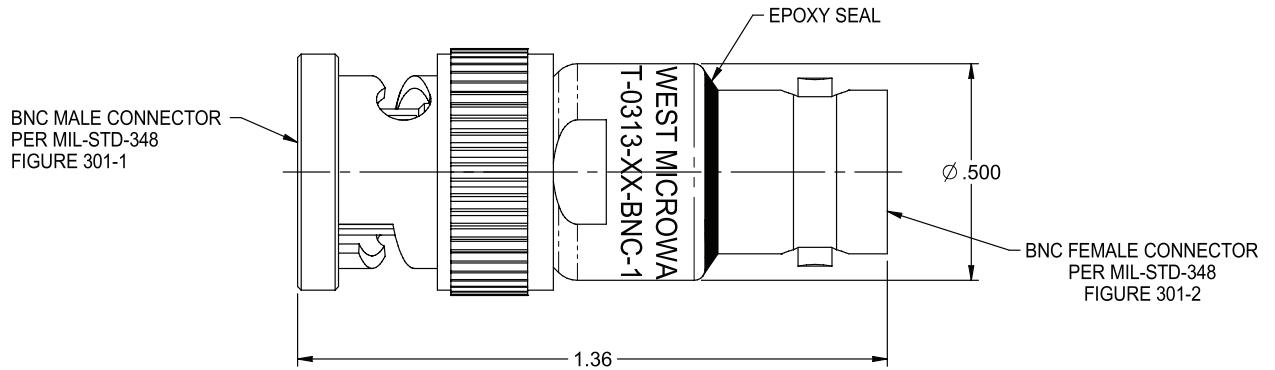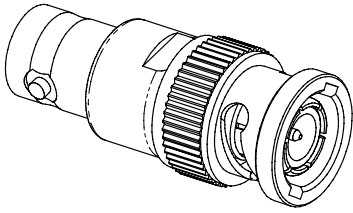

NOTES: UNLESS OTHERWISE SPECIFIED.

1. SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC TO 4.0 GHz
 - 1.2 ATTENUATION & ACCURACY:
 - 0 dB: $\pm 0.3/-0$ dB
 - 1-6 dB: ± 0.3 dB
 - 7-20 dB: ± 0.5 dB
 - 21-30 dB: ± 0.8 dB
 - 1.3 IMPEDANCE: 50 OHM
 - 1.4 VSWR (MAX): 1.25:1
 - 1.5 MAXIMUM INPUT POWER: 2 WATTS AVG. AT 25°C
DERATED LINEARLY TO 0.5 WATTS AT 125°C
 - 1.6 OPERATING TEMP. RANGE: -55°C TO 125°C
 - 1.7 FINISH: NICKEL PLATED BRASS.

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued under the strict permission and to remain valid upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009	3RD ANGLE PROJECTION RoHS ☒ 2002/95/EC UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX $\pm .02$.XXX $\pm .005$ ANGLES $\pm 2^\circ$	Midwest Microwave		
		Title: BNC ATTENUATOR, 0-30 dB		
		Model No. ATT-0313-XX-BNC-10		
		Size A	DO NOT SCALE DRAWING	Date: 5/8/2013