

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[ATT-0444-12-SMA-02](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 ATTENUATION VALUES: 1 THRU 30dB
IN 1dB INCREMENTS (SEE TABLE)
- 1.3 ATTENUATION ACCURACY:
- | | |
|-------------------|-------------------|
| DC to 12.4 GHz | 12.4 to 18.0 GHz |
| 1 - 4dB ±0.75dB | 1 - 4dB ±0.75dB |
| 5 - 8dB ±0.75dB | 5 - 8dB ±1.00dB |
| 9 - 12dB ±1.00dB | 9 - 12dB ±1.25dB |
| 13 - 20dB ±1.50dB | 13 - 20dB ±1.50dB |
| 21 - 30dB ±2.00dB | 21 - 30dB ±2.00dB |
- 1.4 MAXIMUM VSWR:
- | | |
|-------------------|--------|
| DC to 4.0 GHz: | 1.25:1 |
| 4.0 to 12.4 GHz: | 1.45:1 |
| 12.4 to 18.0 GHz: | 1.65:1 |
- 1.5 MAXIMUM INPUT POWER: 2 WATTS AVG.
AT +25°C DERATED LINEARLY TO
0.5 WATTS AT +125°C
- 1.6 OPERATING TEMP. RANGE: -65°C to +125°C
- 2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-03815-27-XX)
- 3.0 EPOXY UNIT AS SHOWN (REF.; EPX-08000-44-01)

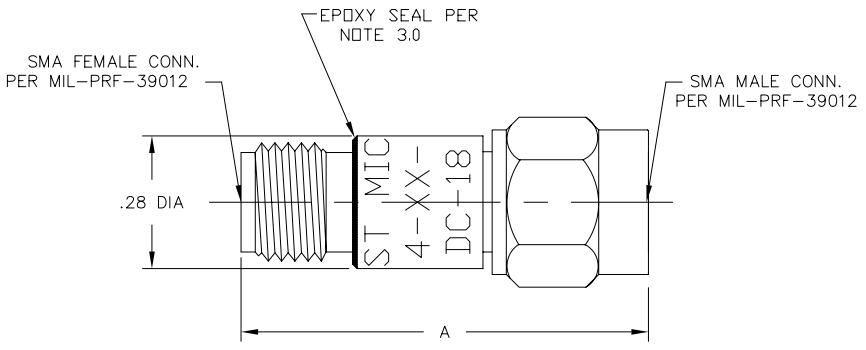

| ATTENUATION VALUE | DIM A |
|-------------------|-------|
| 0-12 dB | .86 |
| 13-30 dB | 1.02 |
| 31-40 dB | 1.13 |

DWG NO. WAS: 02333-01-00

| REV. | DESCRIPTION | DATE |
|------|----------------|----------|
| I | RELEASED | 2/23/79 |
| H | ECR 5402 | 6/11/87 |
| G | ECR 6269 | 1/1/88 |
| J | ECR 6545 | 6/29/89 |
| K | ECR 7107 | 1/25/90 |
| L | ECR 7121 | 1/25/90 |
| M | ECR 6933 | 1/26/90 |
| N | SHOW CORR. P/N | 2/15/90 |
| O | ECN 10832 | 9/3/91 |
| P | REDRAW ON CAD | 4/2/92 |
| R | ECN 14825 | 10/30/96 |
| S | ECN 19049 | 2/24/03 |
| T | ECN 21171 | 1/5/07 |

| | | | | | | |
|---|--|----------------------------------|--------------------------------|--------------|---------------|--|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: | FSCM NO. 34078 MIDWEST MICROWAVE | | | | | |
| | NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave | | | | | |
| 3 PLACE DECIMALS ±.005 | TITLE ATTENUATOR | | | | | |
| 2 PLACE DECIMALS ±.02 | DRAWING NUMBER ATT-0444-XX-SMA-02 | | | | | |
| FRACTIONS ±1/64 | PARALLELITY: T.I.R. _____ | SCALE: 5=1 | | | | |
| FLATNESS: T.I.R. _____ | CONCENTRICITY: T.I.R. _____ | SHEET 1 of 1 | | | | |
| ANGLES AND PERPENDICULARITY: ±1° | <table border="1"> <tr> <td>DRAWN/DATE A.BEATTY 4/2/92</td> <td>ENG./DATE G.KOZAK 4/9/92</td> </tr> <tr> <td>CHECKED/DATE</td> <td>APPROVED/DATE</td> </tr> </table> | DRAWN/DATE A.BEATTY 4/2/92 | ENG./DATE G.KOZAK 4/9/92 | CHECKED/DATE | APPROVED/DATE | |
| DRAWN/DATE A.BEATTY 4/2/92 | ENG./DATE G.KOZAK 4/9/92 | | | | | |
| CHECKED/DATE | APPROVED/DATE | | | | | |