

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[ATT-0550-00-35M-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

MODEL NUMBER
ATT-0550-XX-35M-02


NOTES:

- 1.0 SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 26.5 GHz
- 1.2 ATTENUATION ACCURACY:
 - 0dB +0.5dB
 - 0.5-6.5dB ±0.5dB
 - 7-20dB ±0.7dB
 - 21-40dB ±1.5dB
- 1.3 MAXIMUM VSWR: 1.07 + 0.015 f (GHz)
- 1.4 MAXIMUM INPUT POWER: 2 WATTS AVG.
AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2. MARKING

- 2.1 MARK UNIT AS SHOWN
(REF.: INK-06747-27-XX)

- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS

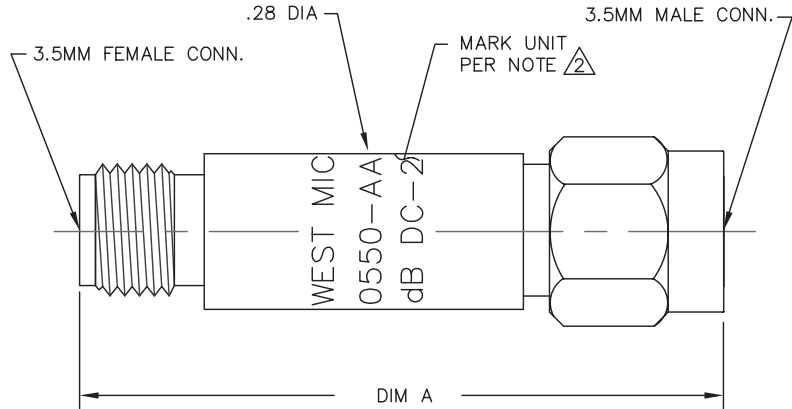

ATTENUATION VALUE	DIM A
0 - 29dB	1.36 (34.5)
30 - 40dB	1.47 (37.3)

WAS DWG. #: 06608-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/26/98
A	ECR 4550	5/27/98
B	ECR 4946	11/4/98
C	ECR 5703	11/9/97
D	ECR 5734	11/20/97
E	ECR 6545	8/1/99
F	ECR 6933	1/23/00
G	ECR 7143	2/6/90
H	ECR 7564	7/25/90
I	ECN 10814	7/23/91
J	ECN 11089	10/22/91
K	ECN 13321	3/14/94
L	ECN 15336	6/12/96
M	ECN 18722	9/9/02

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R.
FLATNESS: T.I.R.
CONCENTRICITY: T.I.R.
ANGLES AND PERPENDICULARITY: ±1°

PART CODE 34078		TITLE MIDWEST MICROWAVE	
		ATTENUATOR OUTLINE DRAWING	
DRAWN/DATE C.RICKARD 7/23/91	ENG./DATE G.KOZAK 7/29/91	DRAWING NUMBER ATT-0550-XX-35M-02-01	REV. M
APPROVED/DATE ALB.ATTY 7/29/91		SCALE: 5=1	SHEET 1 of 1