

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[DCB-3511-MF-SMA-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 0.5 to 18.0 GHz
- 1.2 IMPEDANCE: 50 OHMS, NOM.
- 1.3 VSWR: 1.35:1 MAX.
- 1.4 INSERTION LOSS: 0.5dB MAX.
- 1.5 DC WORKING VOLTAGE: 200 VOLTS, MIN.
- 1.6 OPERATING TEMPERATURE: -20°C to +100°C
- 1.7 TYPE: INNER/OUTER

2.0 MARKING:

MARK UNIT AS SHOWN.

3.0 EPOXY SEAL USING LOCTITE 425.

SMA FEMALE CONN.
PER MIL-PRF-39012

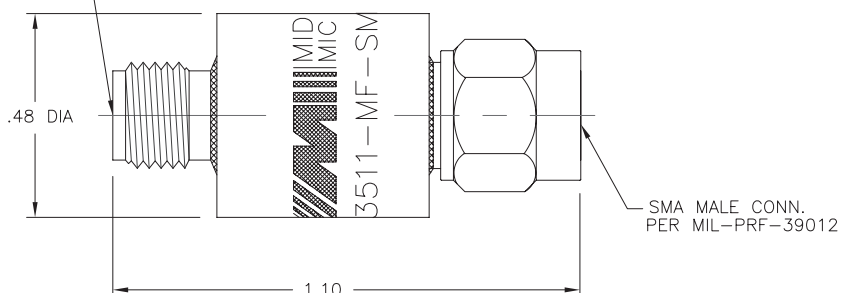

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

GAGE CODE 34078		MIDWEST MICROWAVE	
		TITLE DC BLOCK OUTLINE DRAWING	
DRAWN/DATE M.HOLLMAN 9/1/92	ENG./DATE G.KOZAK 9/3/92	DRAWING NUMBER DCB-3511-MF-SMA-02-01	REV. D
CHECKED/DATE A.BEATTY	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1

REV.	DESCRIPTION	DATE
-	RELEASED	9/4/92
-1	ADDED TITLEBLOCK	5/26/05
A	ECN 20639	12/21/05
D	ECO 23232	1/24/11