

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[PWD-5514-T2-TNC-79](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 4.0 to 8.0 GHz
- 1.2 INSERTION LOSS: .50dB MAX.
- 1.3 ISOLATION: 20dB MIN
- 1.4 VSWR (MAX): 1.35:1
- 1.5 OUTPUT UNBALANCE:
 - 1.5.1 AMPLITUDE: 0.20dB MAX.
 - 1.5.2 PHASE: 3° MAX.
- 1.6 MAX. INPUT POWER: 5 WATTS
- 1.7 OPERATING TEMP. RANGE: -55°C to +125°C

2.0 FINISH

- 2.1 GREY PER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400

3.0 MARKING: MARK UNIT AS SHOWN.
SLK-08136-82-02

**4.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.**

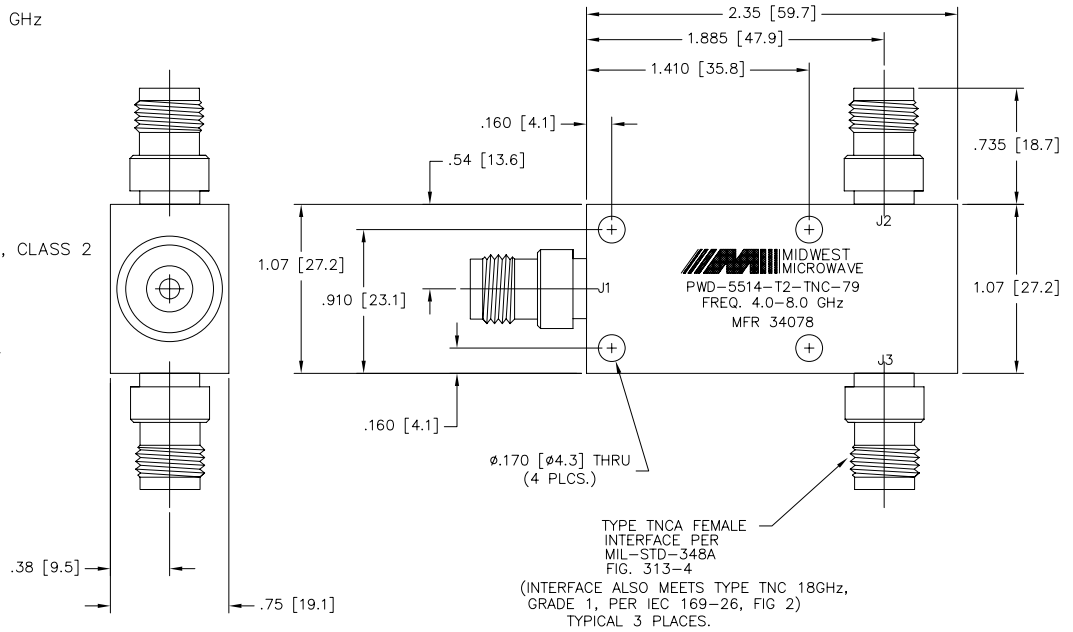

MODEL NUMBER
PWD-5514-T2-TNC-79
REV.
A

DATE	DESCRIPTION	REV.
11/4/02	RELEASED	1
2/5/03	ECN 19029	A

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE POWER DIVIDER	
2 PLACE DECIMALS ±.02		DRAWN/DATE S. ORLOV 10/31/02		END/DATE B. GALLAGHER 10/31/02	
FRACTIONS ±1/64		CHECKED/DATE		APPROVED/DATE	
PARALLELITY: T.I.R. _____		DRAWING NUMBER PWD-5514-T2-TNC-79		SCALE: 2=1	
FLATNESS: T.I.R. _____		SHEET 1 of 1			
CONCENTRICITY: T.I.R. _____					
ANGLES AND PERPENDICULARITY: ±1°					