

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[RFM-7020-26-NNN-79](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: DC to 2500 MHz
- 1.2 OPERATING RF INPUT POWER LEVEL: 1 WATT MAX.
- 1.3 MAIN RF PATH ATTENUATION: 0.5 ± 0.15 dB
- 1.4 SAMPLED PORT COUPLING: 26 ± 1.2 dB
- 1.5 VSWR: 1.20:1 MAX.

2.0 FINISH

- 2.1 GREY PER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400

- 3.0 MARKING: MARK UNIT AS SHOWN.
SLK-08216-82-01

- 4.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

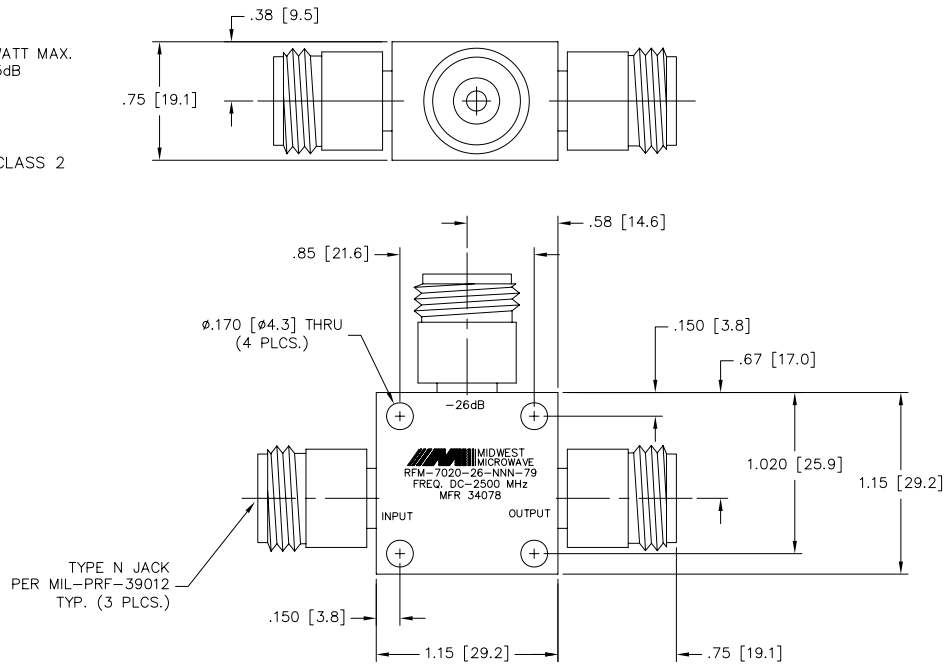

MODEL NUMBER
RFM-7020-26-NNN-79
REV. 1

REV.	DESCRIPTION	DATE
1	RELEASED	2/3/04

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		PDCW NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS $\pm .005$		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE	
2 PLACE DECIMALS $\pm .02$				RF SIGNAL SAMPLER	
FRACTIONS $\pm 1/64$					
PARALLELITY: T.I.R. _____		DRAWN/DATE S. ORLOV 2/3/04		ENGINEER/DATE P. GOODMAN 2/3/04	
FLATNESS: T.I.R. _____		CHECKED/DATE		APPROVED/DATE	
CONCENTRICITY: T.I.R. _____				DRAWING NUMBER	
ANGLES AND PERPENDICULARITY: $\pm 1^\circ$				RFM-7020-26-NNN-79	
				SCALE: 2=1	
				SHEET 1 of 1	