

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[TRM-2050-MM-BNC-10](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:


1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 500 MHz
 1.2 MAXIMUM INPUT POWER:
 +25°C 2 WATTS
 +125°C 0.5 WATTS
 1.3 OPERATING TEMPERATURE RANGE:
 -55°C to +125°C
 1.4 MAXIMUM VSWR: 1.25:1
 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN
 (REF.: INK-02639-27-55)

- 3.0 DIMENSIONS IN PARENTHESIS ARE
 IN MILLIMETERS.

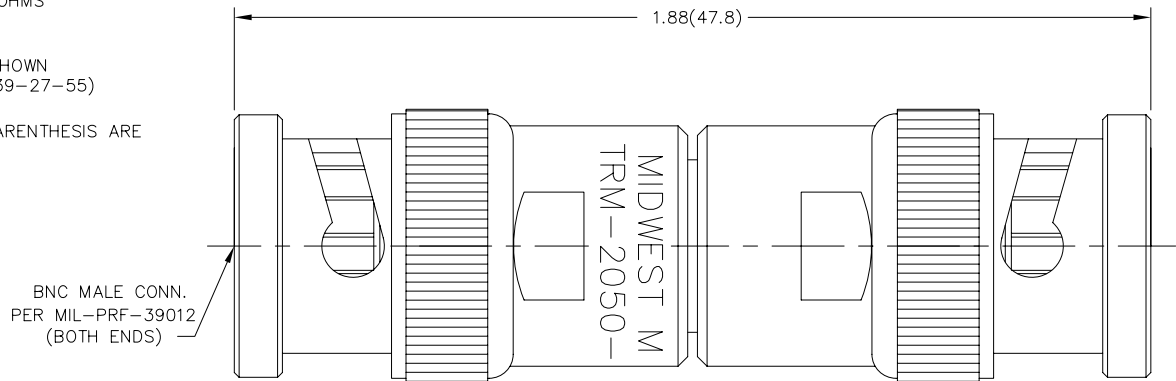

REV.	DESCRIPTION	DATE
1	RELEASED	2/16/95
A	ECN 14586	7/6/95
AT	ADDED TITLE BLOCK	10/26/95

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FIRM NO. 34078 <i>MIDWEST MICROWAVE</i>	
3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	
DRAWING/DATE A. BEATTY 2/14/95		ENG./DATE A. OSGA 2/16/95	
CHECKED/DATE P. GOODMAN 2/16/95		APPROVED/DATE	
		TITLE TERMINATION	
		DRAWING NUMBER TRM-2050-MM-BNC-10	
		SCALE: 5=1	SHEET 1 of 1