

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[TRM-2090-MC-SMA-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC TO 18.0 GHz

1.2 MAXIMUM INPUT POWER:

2 WATTS AT +25°C

1 WATT AT +125°C

1.3 MAXIMUM VSWR:

DC to 4 GHz: 1.05:1

4 to 12 GHz: 1.10:1

12 to 18 GHz: 1.14:1

1.4 IMPEDANCE: 50 OHMS

1.5 TEMPERATURE RANGE: -65°C to +125°C


2.0 MARKING:

2.1 MARK UNIT AS SHOWN:

REF.: INK-02639-27-06

3.5" BEAD CHAIN

.13 DIA THRU

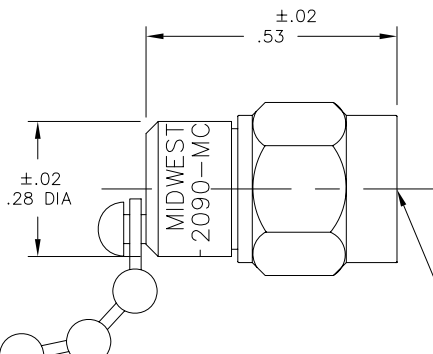

SMA MALE CONN.
PER MIL-PRF-39012

REV.	DESCRIPTION	DATE
A	RELEASED	7/26/95
B	EDR 3876	6/24/95
C	EDR 5855	2/20/98
D	EDR 6545	8/27/99
E	EDR 6940	11/14/99
F	EDR 7356	4/24/90
F1	REPAIR ON CAD	9/6/91
F1	EDR 11825	5/18/92
F1	ADDED TITLEBLOCK	10/28/95

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE 2 WATT TERMINATION	
2 PLACE DECIMALS ±.02		DRAWN/DATE A.BEATTY 9/6/91		DRAFTING NUMBER TRM-2090-MC-SMA-02	
FRACTIONS ±1/64		ENG./DATE G.KOZAK 9/23/91		SCALE: 5=1	
PARALLELITY: T.I.R. _____		CHECKED/DATE C.RICKARD 9/10/91		SHEET 1 of 1	
FLATNESS: T.I.R. _____		APPROVED/DATE			
CONCENTRICITY: T.I.R. _____					
ANGLES AND PERPENDICULARITY: ±1°					