

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[TRM-2180-M0-SSM-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.10+0.01f(GHz)

2.0 MATERIALS:


- 2.1 HOUSING AND COUPLING NUT:
STAINLESS STEEL NON-MAGNETIC PER
ASTM-A582, TYPE 303.
- 2.2 CENTER CONTACT: BERYLLIUM COPPER ROD
ALLOY C172 TEMPER H, PER ASTM-B196.
- 2.3 DIELECTRIC: PTFE FLOUROCARBON PER
ASTM-D1457.

3.0 FINISHES:

- 3.1 HOUSING AND COUPLING NUT:
PASSIVATED PER MIL-F-14072 AND QQ-P-35C, TYPE IV
- 3.2 CENTER CONTACT: GOLD PER MIL-G-45204,
TYPE II, CLASS 1.

**4.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-09035-27-10)**

**5.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.**

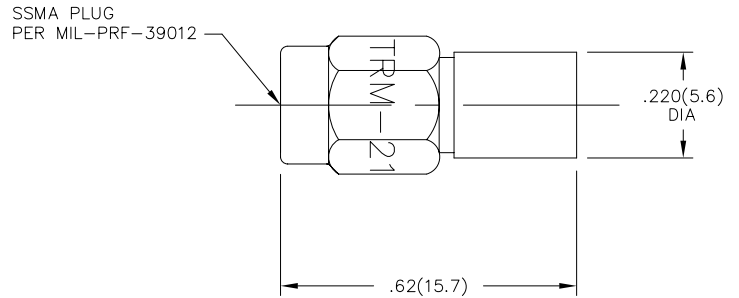

REV.	DESCRIPTION	DATE
—	RELEASED	12/2/94
A	ECN 14280	2/10/95
B	ECN 18498	4/26/02

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FORM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION — SSMA PLUG
DRAWN/DATE M.HÖLLMANN 12/2/94		ENG./DATE A.OSGA 12/2/94	DRAWING NUMBER TRM-2180-M0-SSM-02
CHECKED/DATE A.BEATTY 12/2/94		APPROVED/DATE C.RIGGE 4/26/02	SCALE: 5=1 SHEET 1 of 1