

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[TRM-2181-F0-SMM-02](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
- 1.3 OPERATING TEMP. RANGE: -65°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.10+0.01f(GHz)

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-09035-27-39)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

SMM FEMALE CONN.
PER MIL-STD-348A

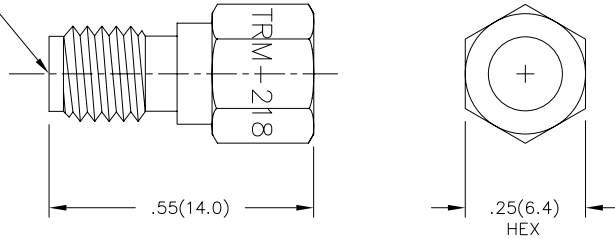

REV.	DESCRIPTION	DATE
-	RELEASED	5/13/03
A	ECN 19329	7/29/03

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FROM NO.	34078			MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave				TITLE TERMINATION		
	3 PLACE DECIMALS ±.005						
	2 PLACE DECIMALS ±.02						
	FRACTIONS ±1/64				DRAWING NUMBER TRM-2181-F0-SMM-02		
PARALLELITY: T.I.R. _____							
FLATNESS: T.I.R. _____							
CONCENTRICITY: T.I.R. _____				SCALE: 5=1			
ANGLES AND PERPENDICULARITY: ±1°							SHEET 1 of 1