

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)
[XL1 BLK](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION: HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS. CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-553. GOLD PLATED PER MIL-G-45204.4001 0.00001" [0.000254] THICK MINIMUM. SPRING: STAINLESS STEEL TYPE 302.
- PERFORMANCE: MAXIMUM CURRENT: 6.9 AMPS WITH 76° TEMPERATURE RISE. MAXIMUM VOLTAGE: 2.0 KV MAXIMUM TEMPERATURE: 175°F (79°C)
- FEATURES: HOOK FITS COMPONENTS UP TO $\phi 0.040$ " [1.01] FIELD SERVICEABLE.

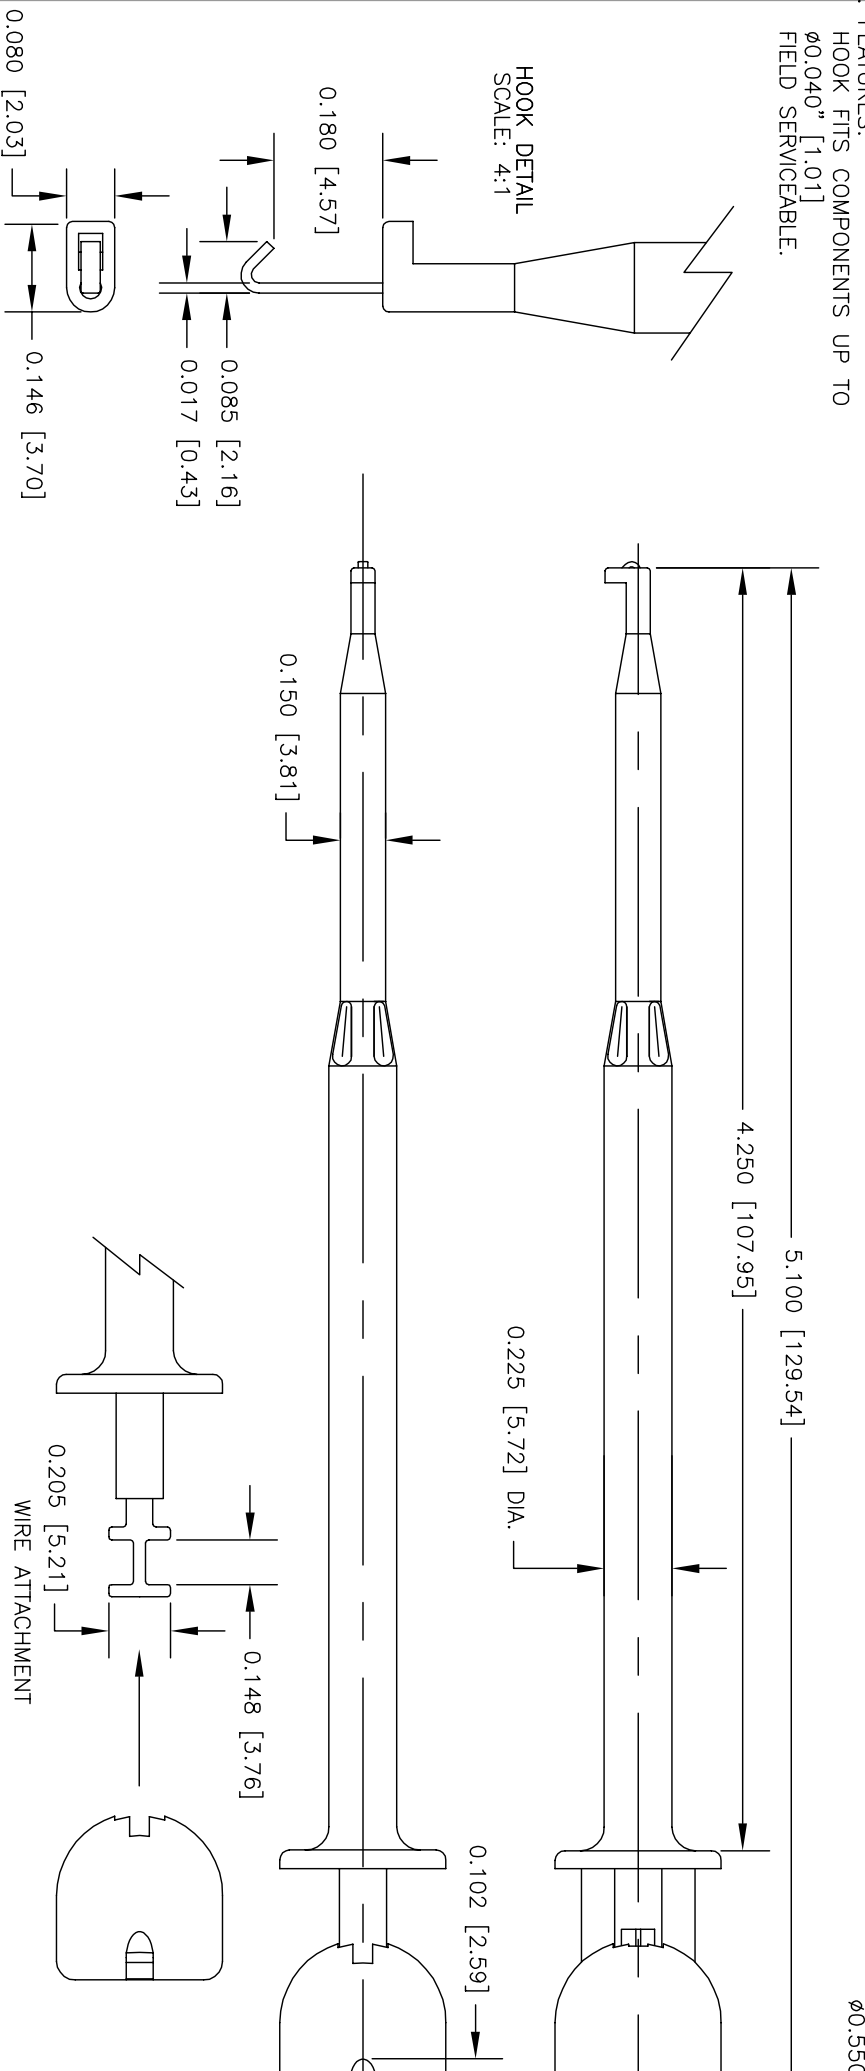

ACTUAL SIZE

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS' DECIMALS ANGLES ° .XX ° .XXX °		CONTRACT NO.	
MATERIAL SEE NOTE.	APPROVALS	DATE	
FINISH SEE NOTE.	R.L.	6/09	
DO NOT SCALE DRAWING	APPROVED BY		DESCRIPTION E-Z-MINI-CONN
APPLICATION	USED ON		SIZE CODE IDENT NO. DRAWING NO. B 08505 XL1
NEXT ASSY			SCALE 2:1

LTR	DESCRIPTION	REVISIONS