

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[P227EE1A20B.094BLK](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

SHEET / UR .]

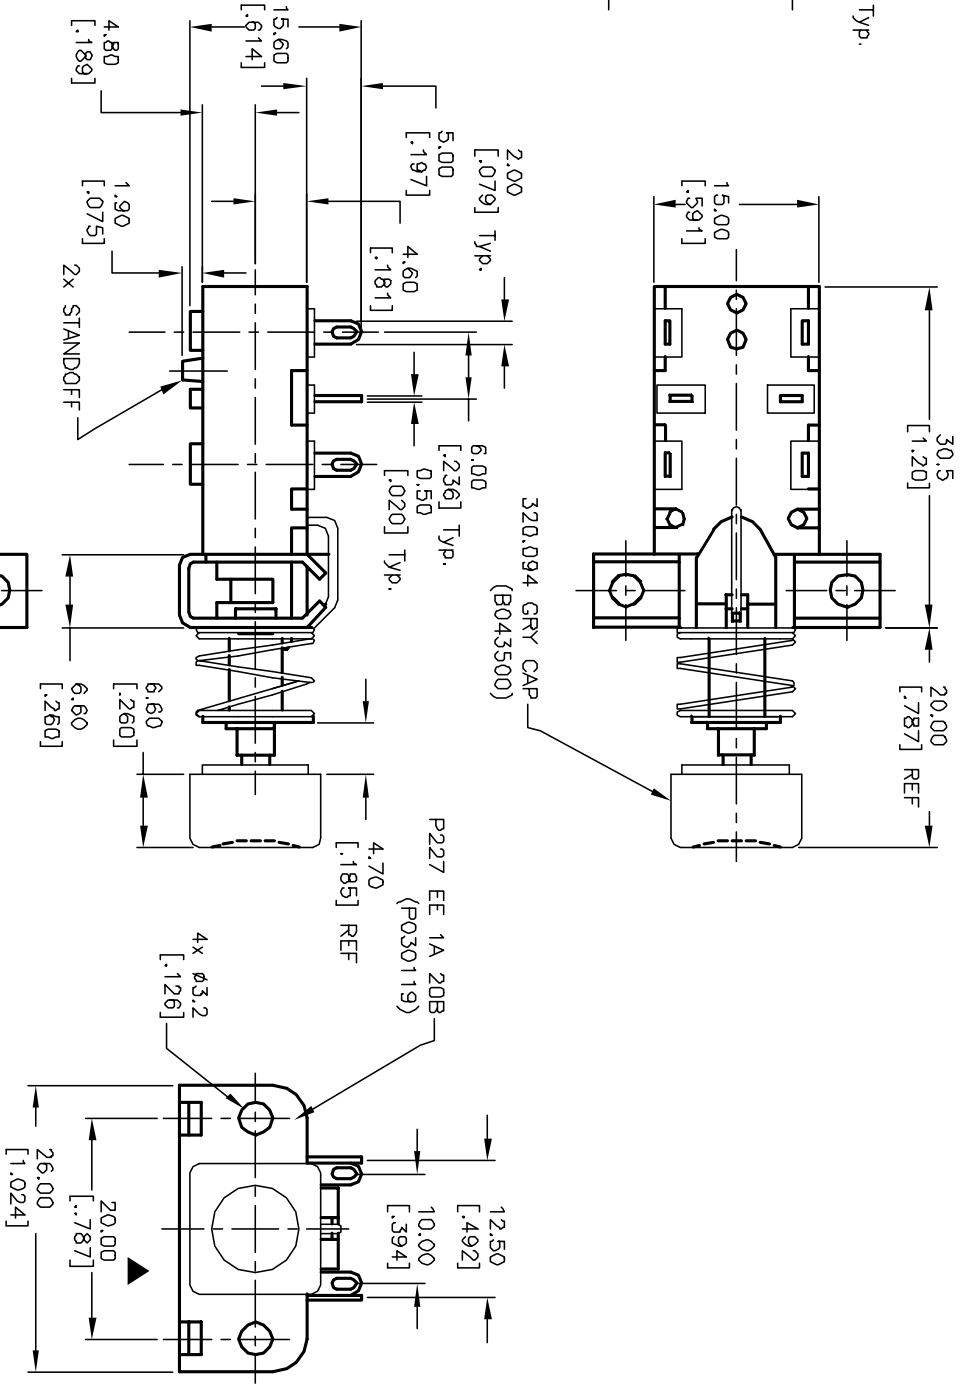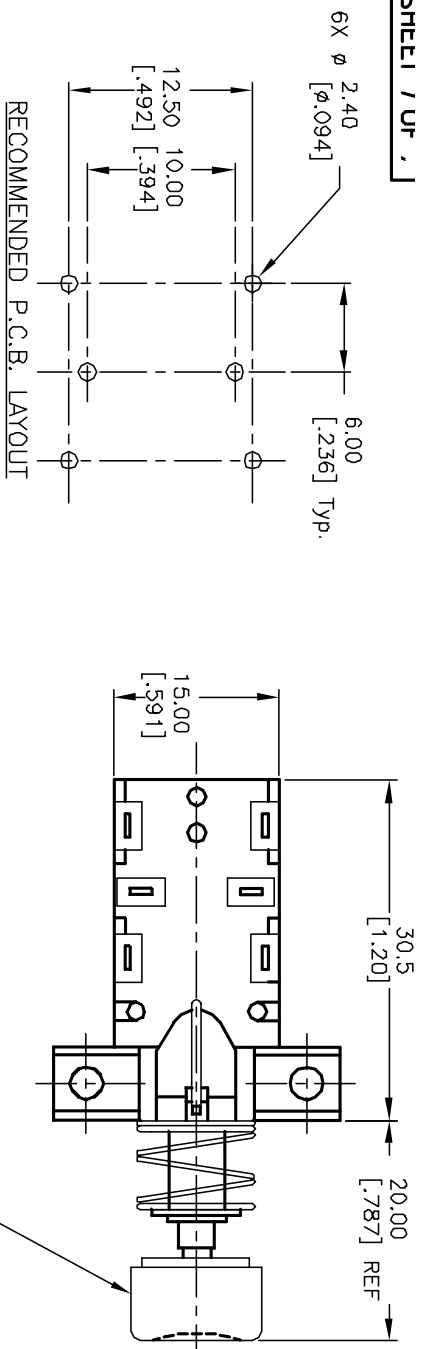

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT MATERIAL: COPPER ALLOY W/ SILVER PLATE
5. RATING: 7A@125V ; 4A@250
6. CONTACT RESISTANCE: 20MΩ MAX @ 5V DC 1A
7. DIELECTRIC STRENGTH: AC 1500V RMS
8. OPERATING FORCE: 550±150gf TYP.
9. TRAVEL: FULL:5.5, LOCK:4.0
10. ▲ DENOTES CRITICAL PARAMETER.

REV. A		13123		RELEASED FOR PRODUCTION		5/9/03		AR		TITLE		P227EE1A20B.094BLK		DR		AR		DVS		XP0257A		REV		A	
ECN NO.		DESCRIPTION		DATE		CHKD		SCALE		DATE		DR		DVS		REV		A		A		A		A	
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p>																									

E-SWITCH®