

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)
[FFA.1S.650.CTAC62Z](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

FFA.1S.650.CTAC62Z

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0



Download

- [Request a quote](#)
- [Catalog](#)

Series	1S
Termination type	Male solder
IP rating	50
Cable Ø	5.20 - 6.20 mm
Matching parts	ERA.1S.650.CTL

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFA*: Straight plug, cable collet and nut for fitting a bend relief
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C62: 5.2 - 6.2 mm
Variant	Z : Nut for fitting a bend relief

Performance

Configuration	1S.650 : 1 Triax (50 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

Specifications

Contact Type: Triaxial 50 Ohm (Solder)
 Max. Matings: 1000
 Contact Dia.: 0.9 mm (0.035in)
 Vtest: 1200 V (AC), 1700 V (DC)
 Impedance: 50 Ohm
 VSWR: 1.01 + 0.17 * f /GHz
 Cable type: RGT 178, RGT 174, Belden 9222

Others

Endurance (Shell): 5000 mating cycles

Temp (min / max): -55°C / +250°C

Humidity (max): ≤95% [at 60 deg C / 140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [6 ms]

Salt Spray Corrosion: >144 hr

Climatical Category: 50/175/21


Shielding (min): 75 dB (10 MHz)

Shielding (min): 40 dB (1 GHz)

IP Rating: 50

DRAWINGS

Draws

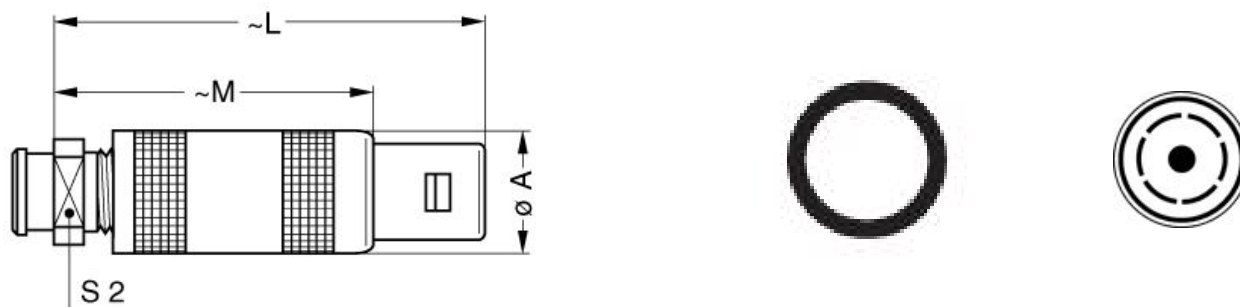

Dimensions

	A	L	M	S2
mm.	12	42.5	31.5	9
in.	0,47	1,67	1,24	0,35

RECOMMENDED BY LEMO

Tools

Spanner wrench: MTZ.1B.132.090

Cables