

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)

[FFA.3E.707.CLAC75Z](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

FFA.3E.707.CLAC75Z

SUMMARY

Wires

Low	7
High	1
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	3E
Termination type	HV contact
IP rating	68
Cable Ø	7.10 - 7.50 mm
Matching parts	ERA.3E.707.CLL



Download

- [Request a quote](#)
- [Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFA*: Straight plug, cable collet and nut for fitting a bend relief
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C75: 7.1 - 7.5 mm
Variant	Z : Nut for fitting a bend relief

Performance

Configuration	3E.707 : 1 High V. 7 Low V.
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	6 Amps

Specifications

Contact Type:	Solder
Working voltage HV contact - Us (kV rms)	2.1
Test voltage LV Ue (kV rms)	1
Rated current LV (A)	8


Others

Endurance (Shell): 5000 mating cycles

Temp (min / max): -55° C / +200° C
 Humidity (max): <=95% [at 60 deg C / 140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Salt Spray Corrosion: >1000 hr
 Climatical Category: 50/175/21
 Shielding (min): 95 dB (10 MHz)
 Shielding (min): 80 dB (1 GHz)
 IP Rating: 68

DRAWINGS

Draws

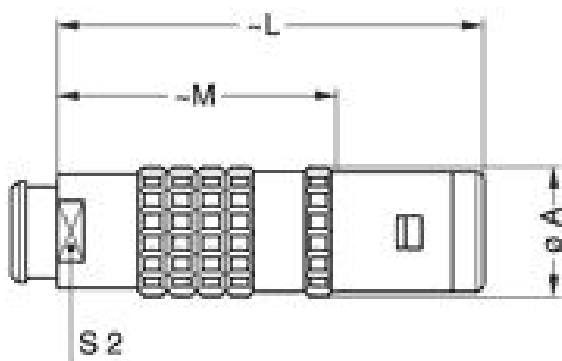

Dimensions

	A	L	M	S2
mm.	19	60	40	15
in.	0,75	2,36	1,57	0,59

RECOMMENDED BY LEMO

Tools

Spanner wrench: MTZ.3E.265.150
 Caps: BFA.3E.100.NAS

Cables