

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)
[GMA.0B.030.RV](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	0B
Termination type	No contacts / Accessory
IP rating	0
Cable Ø	3.00 - 3.40 mm
Matching parts	xxx



Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	GMA*: Bend relief Green
Keying	No keying
Housing Material	Silicone elastomer VMQ
Cable Fixing	∅ 3 - 3.4 mm
Variant	V : Green

Performance


Configuration
Insulator
Rated Current

Others

Temp (min / max): -60°C / +200°C
Temperature range in water steam: +140°C
IP Rating: 0

DRAWINGS

Draws

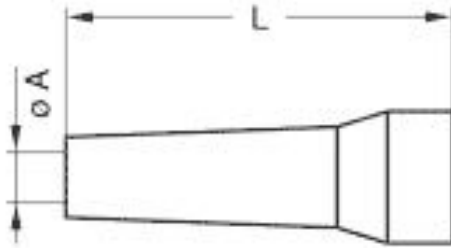

Dimensions

RECOMMENDED BY LEMO

Tools

None

Cables