

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)

[PRH.M1.4GL.AC52V](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRH.M1.4GL.AC52V

SUMMARY

Wires

Low	14
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	xxx



Download

- [Request a quote](#)
- [Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PR*: Free receptacle with cable collet
Keying	2 keys (beta=170; plug: female contacts, receptacle: male contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	C52: 4 - 5.2 mm
Variant	V : Green collet nut

Performance

Configuration	1P.M14 : 14 Low Voltage
Insulator	
Rated Current	2 Amps

Specifications

Contact Type:	Solder
Max. Matings:	2000
Contact Dia.:	0.5 mm (0.0201in)
Bucket Dia.:	0.45 mm (0.018in)
Max. Solid Conductor:	0.09 mm ² (AWG 28)
Max. Stranded Conductor:	0.09 mm ² (AWG 28)
R (max):	8.5 mOhm
Test voltage (kV rms) Contact-contact:	0.6


Air clearance min. (mm) or Creepage distance min. (mm): 0.5

Others

F ret (min): 50 N
 F ret (max): 150 N
 R leak (He) (max): 0.0000001 mbar*l/s (if vacuum-tested)
 IP Rating: 50

DRAWINGS

Draws

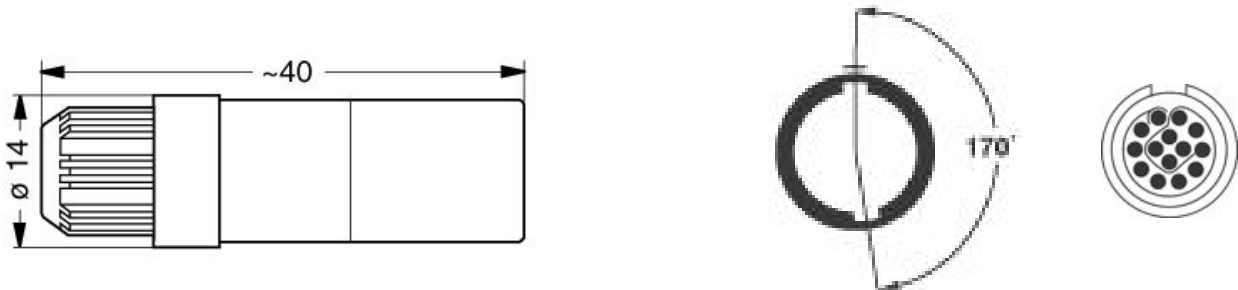

Dimensions

	A	L
mm.	14	40
in.	0,55	1,57

RECOMMENDED BY LEMO

Tools

None

Cables