

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[LEMO](#)  
[SAS.M16.GLM.7NZ](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	SP
Termination type	
IP rating	50
Cable Ø	6.60 - 7.50 mm
Matching parts	xxx

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	SA*: Straight plug, key (N) or keys (P, S and T), with black cable collet
Keying	3 key (alpha=50, plug: female contacts, receptacle: male contacts)
Housing Material	
Cable Fixing	∅ 6.6 - 7.5 mm
Variant	NZ : Black collet nut for bend relief

### Performance

Configuration	
Insulator	
Rated Current	3.0 Amps

### Specifications


Test voltage (kV rms) Contact-contact:	1.30
Air clearance min. (mm) or Creepage distance min. (mm):	0.8

### Others

IP Rating:	50
------------	----

## DRAWINGS

### Draws

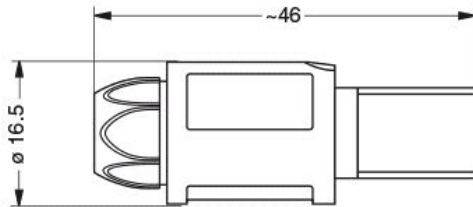

### Dimensions

	A	L
mm.	16.5	48
in.	0,65	1,89

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 28-30-32/4-3-3

Positionner: SOE.050.VM

Replacement contact: SLN.605.ZZM

### Cables