

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Littelfuse](#)
[01110512Z](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

SUGGESTED MOUNTING HOLE PATTERN
 FOR 4.5 X 15mm FUSE (2AG)
 SCALE = 4:1

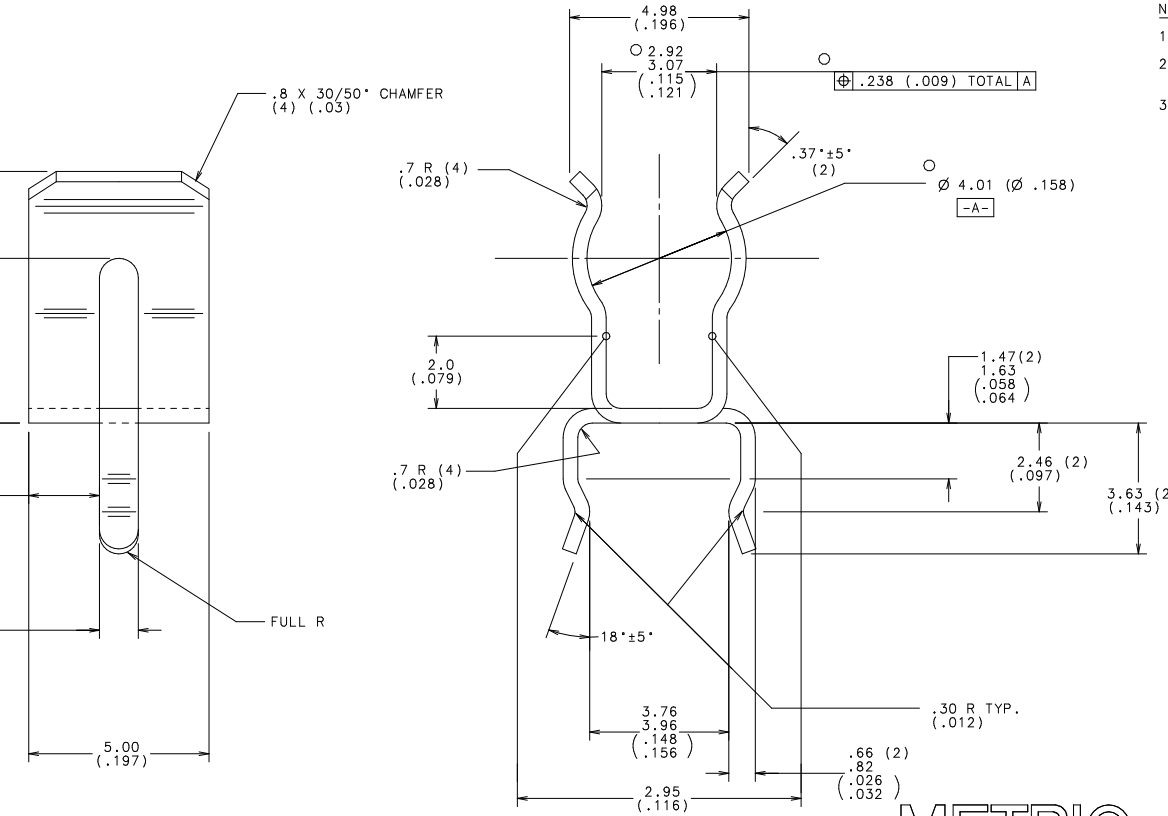

NOTES:

1. DECIMAL EQUIVALENT = (.XXX)
2. TOOLING MUST ALSO BE CAPABLE OF PRODUCING PART No. 01110501Z.
3. HEAT TREAT 600°F FOR 2 HOURS.

2	010113	HIGH PURITY TIN	.015	LB
1	046184	BeCu .41(.016) THICK	.858	LB
NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
○	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE			
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, -PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.			
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			
COPIES TO				
1	9	18		
2	10	19	FINISH	
3	12	20	TIN PLATE .0012-.0063 PER L/IN. PER L/IN. FB-001002-B	
4	13	21	DRW	PJM DATE 12/28/00 SCALE 10:1
5	14	23	CHK	TYPE SUPER DR
6	15	33	APPD	DATE
7	16	43	RAW STK	WT
8	17	53	LBS/M	
TWO PLACES DEC ± .25 FRACTION ±				
THREE PLACES DEC ± .01 ANGULAR ±1°				
TITLE 2 AG 75 X 20mm P.C. MOUNT FUSE CLIP W/OUT EARS				
Littelfuse		REVISION	DRWG. NO.	FINAL
			01110512Z	

METRIC
 UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MILLIMETERS