

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Newava Technology Inc.](#)
[S22230](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SPECIFICATIONS:

1. INDUCTANCE: @ 10 kHz, 0.1 Vrms,
1 - 3 > 2.0 mHy
2. DCR: mOHMS Nom
1 - 3 = 0.8
4 - 6 = 1.0
3. LEAKAGE INDUCTANCE: 1 - 3, 0.1V @ 100kHz
SHORT 4 - 6 < 8.0 uHy
4. INTERWINDING CAPACITANCE:
1 - 3 to 4 - 6 @ 100 KHz, 1.0V < 5.0 pf
5. TURNS AND PHASE:
1 - 3 : 4 - 6 = 1 : 1 +/- 2%
6. DIELECTRIC STRENGTH:
3750 Vrms
Mil-T-27, Section 4.8.8 Testing

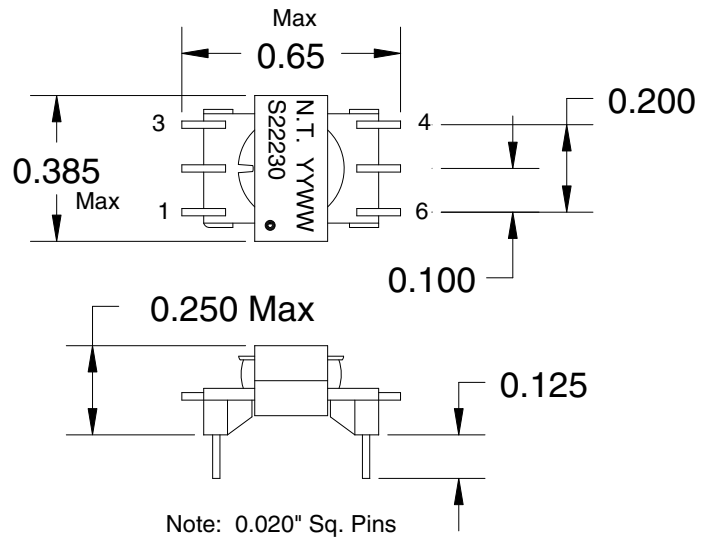

Note: Designed to operate with Maxim 250/251

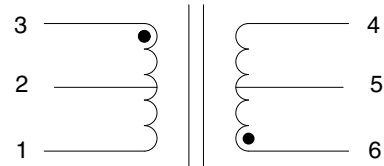

A				DESCRIPTION	
REV.	DATE	ECN	BY		
TOLERANCES ON				Newava Tech. Watertown, SD 57201 605-886-0264	Transformer Isolation, 1:1
.XXX	.XX	ANGLE			
+ -	+ -	+ -	DATE	SCALE	MODEL
DRAWN:				DRAWING NO.	
CHECKED: -			-	S22230	
APPROVED: -			-	NEXT ASSY:	REV. A
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART				OR USED DETRIMENTALLY TO OUR INTEREST	
					SHEET 1 OF 1