

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Newava Technology Inc.](#)
[S22133](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SPECIFICATIONS:

1. INDUCTANCE: @ 10 kHz, 0.1 Vrms,
1 - 3 > 225 uHy
2. DCR: mOHMS Nom
1 - 3 = 0.1
4 - 6 = 0.1
3. LEAKAGE INDUCTANCE: 1 - 3, 0.10 V @ 100kHz
SHORT 4 - 6 < 0.7 uHy
4. INTERWINDING CAPACITANCE: with Shield Grounded
1 - 3 to 4 - 6 @ 100 KHz, 1.0V < 2.0 pf
5. TURNS AND PHASE:
1 - 3 : 4 - 6 = 1 : 1 +/- 2%
6. DIELECTRIC STRENGTH:
1500 VAC 1 sec

Note: Designed to operate with Crystal Semiconductor
CS8401.8402, 8411 & 8412

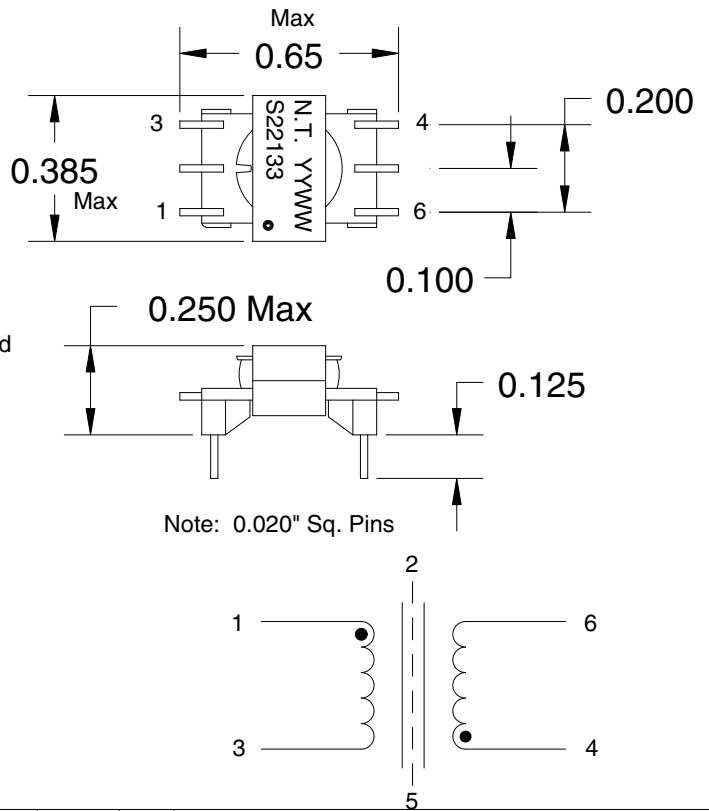

A				DESCRIPTION	
REV.	DATE	ECN	BY		
TOLERANCES ON				Newava Tech. Watertown, SD 57201 605-886-0264	Transformer Pulse, 1:1
.XXX	.XX	ANGLE	DATE		
+ .	+ .	+ .		SCALE	MODEL
DRAWN: -				DRAWING NO.	
CHECKED: -				S22133	
APPROVED: -				REV.	
			NEXT ASSY:	A	
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART				OR USED DETRIMENTALLY TO OUR INTEREST	
				SHEET 1 OF 1	