

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1933273](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## PST 1,3/11-5,0

Order No.: 1933273

The figure shows a 10-position version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1933273>

Header, Nominal current: 12 A, Nom. voltage: 250 V, Pitch: 5 mm,  
 Number of positions: 11, Color: black, Assembly: Soldering

Commercial data	
EAN	4017918918767
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.001911 KG
Catalog page information	Page 480 (CC-2009)

### Product notes

WEEE/RoHS-compliant since:  
 01/01/2003



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Dimensions / positions	
Length	2.8 mm
Pitch	5 mm
Dimension a	50 mm
Number of positions	11
Pin dimensions	1,3 mm

PST 1,3/11-5,0 Order No.: 1933273

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1933273>

Hole diameter	1.5 mm
<b>Technical data</b>	
Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A (depends on the plug used)
Nominal voltage $U_N$	250 V
Maximum load current	12 A (depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0

#### Certificates / Approvals



Certification

CCA, CUL, GOST, SEV, UL

#### CUL

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A

#### UL


Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A

PST 1,3/11-5,0 Order No.: 1933273



http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1933273

### Diagrams/Drawings


Drilling plan/solder pad geometry

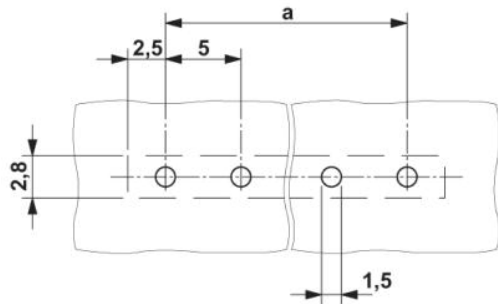

Diagram

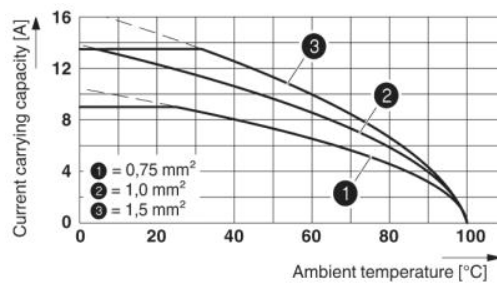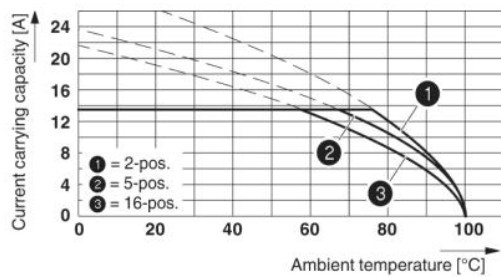

Dimensioned drawing

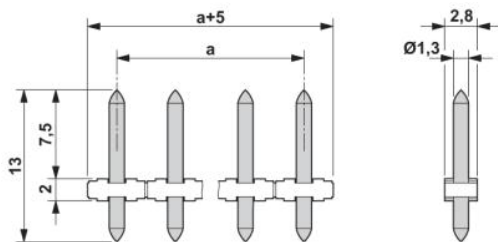

PST 1,3/11-5,0 Order No.: 1933273

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1933273>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;